

Ce document est le produit d'une
numérisation par balayage
de la publication originale.

NATIONAL TOPOGRAPHIC SYSTEM

1:250,000

CANADA

EDITION 2

95 E



Refer to
this map as:

95 E
EDITION 2 ASE
SERIES A 502


GRID ZONE DESIGNATION	100,000 M. SQUARE IDENTIFICATION			
	W	U	X	U
9 V	W	U	X	U
	60			680

TO GIVE A REFERENCE TO NEAREST 1000 METRES
EXAMPLE: HOT SPRINGS
SQUARE: Read letters of 100,000 m. square WU
EASTING: Read number on grid line
immediately to left of point
Estimate tenths of a square from
this line eastward to point.
NORTHING: Read number on grid line
immediately below point
Estimate tenths of a square from
this line northward to point.
MILITARY GRID REFERENCE
(to nearest 1,000 metres) WU9669
If reporting beyond 18° in any direction,
prefix Grid Zone Designation as: 9VWU9669

TEN THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 9

TOPOGRAPHICAL SURVEY DIRECTORATE
SERVICE TOPOGRAPHIQUE
DATE 1-07-85
C.O. APPROVES RELEASE
C.O. APPROUVE

THE DECLINATION OF THE COMPASS NEEDLE, 1960

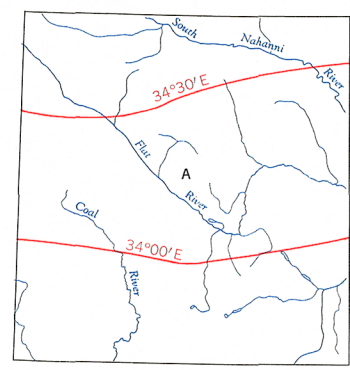


The declination of the compass needle at any place
along a red line is the declination given on that red
line. At other places the declination is between
those given on the neighbouring red lines; thus at
the place marked A, the declination is between
34°30' E. and 34°00' E. The declination of the
compass needle is decreasing 4 minutes annually.

Produced by the ARMY SURVEY ESTABLISHMENT, R.C.E. 1958-60
Aerial photography 1949.

FLAT RIVER

YUKON TERRITORY / NORTHWEST TERRITORIES


Scale 1:250,000



Copies may be obtained from
The Map Distribution Office,
Dept. of Mines and Technical Surveys,
Ottawa.

Contour Interval 500 Feet
Elevations in Feet above Mean Sea Level
Transverse Mercator Projection
North American Datum 1927

- House; Building
- Post Office; School; Church
- Radio Station
- R.C.M.P. Detachment; Tower
- Cliff or low relief
- Esker; Pings
- Swamp or marsh
- Intermittent lake, stream
- Indefinite lake, stream
- Rapid, weir, small Bridge
- Icefield or Glacier
- Dry river bed
- Contours:
elevation
depression
- Wooded area

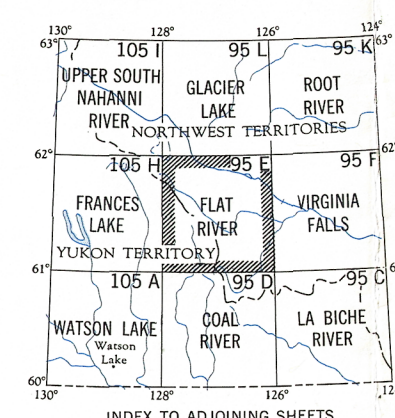

FLAT RIVER
95 E
EDITION 2
REPRINT

95 E
EDITION 2