

Refer to
this Map as : 107E
EDITION 2 ASE
SERIES A 502

100,000 M. SQUARE IDENTIFICATION

GRID ZONE DESIGNATION 9W

TO GIVE A REFERENCE TO NEAREST 1,000 METRES

EXAMPLE: ISLAND

SQUARE: Read letters of 100,000 m. square V H


EASTING: Read number on grid line immediately to left of point. Estimate tenths of a square from this line eastward to point.

NORTHING: Read number on grid line immediately below point. Estimate tenths of a square from this line northward to point.

MILITARY GRID REFERENCE (to nearest 1,000 metres) V H 7294

If reporting beyond 18° in any direction, prefix Grid Zone Designation as: 9W V H 7294

TEN THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 9

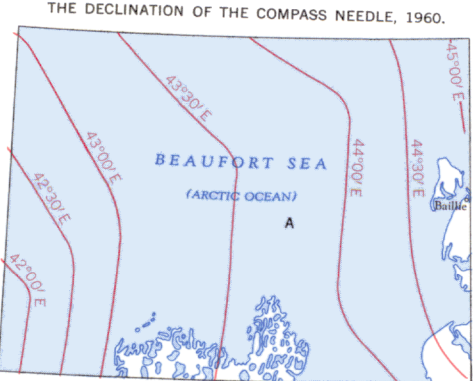


The declination of the compass needle at any place along a red line is the declination given on that red line. At other places the declination is between those given on the neighbouring red lines; thus at the place marked A, the declination is between 43°30' E. and 44°00' E. The declination of the compass needle is decreasing 10 minutes annually.

Produced by the ARMY SURVEY ESTABLISHMENT, R.C.E., 1958-60.
Aerial photography 1950.

CAPE DALHOUSIE
DISTRICT OF MACKENZIE
NORTHWEST TERRITORIES

Scale 1 : 250,000
1 Inch to 4 Miles approximately



Copies may be obtained from
The Map Distribution Office,
Dept. of Mines and Technical Surveys,
Ottawa.

Contour Interval 100 Feet
Elevations in Feet above Mean Sea Level
Transverse Mercator Projection
North American Datum 1927
Shoran Preliminary 1954

REFERENCE

- House; Building
- Post Office; School; Church
- Radio Station
- R.C.M.P. Detachment; Tower
- Cliff or low relief
- Esker; Pingo
- Contours
- elevation
- Depression
- Foreshore flats
- Tundra Polygons
- Tundra Ponds
- Swamp or marsh
- Intermittent lake, stream
- Indefinite lake, stream
- Rapids, large, small; Bridge
- Icefield or Glacier

REFERENCE

- Roads: loose surface, all weather
- dry weather
- cart track or winter road
- trail or portage
- Boundaries: provincial, with monument
- district
- township
- park, reserve, etc.
- Power line; Telephone line
- Horizontal control point, with elevation
- Astronomical monument
- Bench mark, with elevation
- Spot elevation, precise, approximate
- Historical site; Cemetery
- Mine or open cut
- Well; Tank
- Sand or gravel pit