GEOPHYSICAL SERIES
(HIGH RESOLUTION AEROMAGNETIC TOTAL FIELD)

PROVINCE
OF
NOVA SCOTIA
DEPARTMENT OF MINES
MINERAL RESOURCES

DEPARTMENT
OF
ENERGY, MINES AND RESOURCES
GEOLOGICAL SURVEY OF CANADA

20,264 G 21 B/1a
and part of 21 B/1b

20,262 G 20 O/16a
and part of 20 O/16b

20,263 G 20 O/16h
and part of 20 O/16g

20,260 G 20 P/13e
and part of 20 P/13f

66°12′00″ 10′00″ 07′30″ 05′00″ 02′30″ 66°00′00″

44°00′00″ 57′30″ 55′00″ 43°52′30″

ATLANTIC OCEAN

Green Cove
Port Maitland
Baths Point
Red Head
Cranberry Point
Pembroke Cove
Pembroke Shore
Millington
Brenton
Darling Lake
Lake Boote
Lakeside
Doctor Lake
Robbins Lake
Little Brazil Lake
Brazil Lake
Meshamenagan Lake
Allen Lake
Hilden Lake
Hardmans Lake
Lake George
Carleton Lake
Yarmouth
Meshamenagan Lake

INDEX MAP

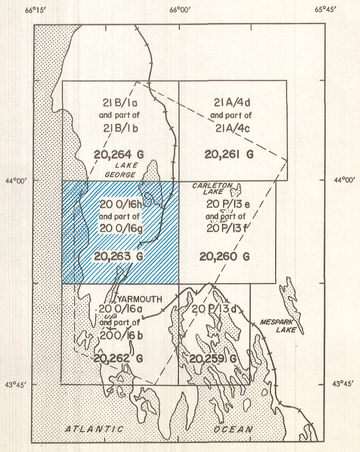

ISOMAGNETIC LINES (absolute total field)

250 gammas.....
50 gammas.....
10-20 gammas.....
2 gammas.....
(1 gamma = 1 nanotesla in SI units)
Magnetic depression.....
Flight lines.....
Flight altitude: 150m above ground level

MAP 20,263 G

20 O/16h and part of 20 O/16g

NOVA SCOTIA

SCALE 1:25,000

FEET 2000 1000 0 1000 2000 3000 4000 5000 1 MILE
METRES 500 0 500 1000 1500 2000 METRES

PUBLISHED 1978

This map was compiled from digitally-recorded aeromagnetic survey data obtained using an inboard rubidium vapour magnetometer which measured the total field with a resolution of 0.02 gamma. Flight altitude was 150 m above ground at 300 m average flight line spacing. Double control lines were flown at an average spacing of 12 kilometers.

The data was edited, compiled, levelled and gamma values for contouring interpolated on a square grid (0.25 cm grid spacing at published map scale) by computer processes.

The levelling process employed the two components of the double control line and the short segments of traverse which connected them where they were not exactly coincident. This data was used to minimize and distribute non-geological contributions from the total magnetic field profile along the control line. The corrected control lines were used to level the traverse lines by a method of minimal sum-total adjustment.

The final data grid was contoured and plotted using the automatic contouring program and digital plotting facilities of Dataplotting Services Ltd., Toronto.

Airborne survey and digital compilation was carried out by Resource Geophysics and Geochemistry Division, Geological Survey of Canada. The survey operations took place in November 1976 using Beechcraft Queenair 65-B80 aircraft CF-WZG.

No correction has been made for the regional gradient of the earth's magnetic field.

The topography for this map was reproduced from 1:50,000 topographical map sheets, published by the Department of Energy, Mines and Resources, Ottawa.

The survey data used to compile this map is available in digital form from the Geological Survey of Canada at the cost of retrieval and copying.

Copies of this map may be obtained from the Mineral Resources, Nova Scotia Department of Mines, Halifax, or from the Geological Survey of Canada, Ottawa.

MAP 20,263 G
20 O/16h
and part of
20 O/16g
NOVA SCOTIA