
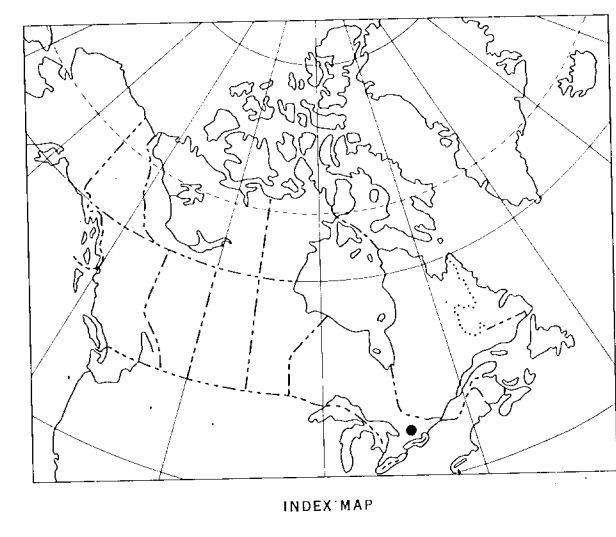
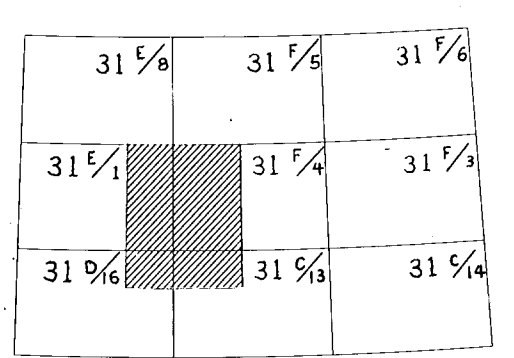


AIRBORNE RADIOMETRIC MAP
BANCROFT
 ONTARIO

POTASSIUM (⁴⁰K)
 Contour interval 10 counts / 2.5 sec.

The gamma radiation contours shown on the machine drawn contour map have been compiled from the profiles which are issued with these maps. Numbered flight-lines are plotted in position on each map. The detectors were 12, 9 x 4 inch NaI(Tl) crystals flown at a mean terrain clearance of 400 feet. The data has been corrected for background, height variation and Compton scattering in the crystals. Due to the statistical nature of the radiation considerable smoothing has been applied to the data. The contouring sequence is self-evident and points of local maxima are represented by triangles. The machine contouring was carried out using a technique developed by Holroyd & Bhattacharyya (G.S.C. Paper 70-55).
 Radiation from the ground is derived almost entirely from the uppermost 12 inches, irrespective of whether it is soil or rock. The Potassium, Uranium and Thorium maps represent the counts received in 2.5 seconds and in the case of the integral for 0.5 seconds. The ratio maps represent the ratio of the counts of the respective elements. An approximate ground concentration may be obtained using the relation:
 1 ppm Uranium \approx 25 counts
 1 ppm Thorium \approx 11 counts
 1 % Potassium \approx 170 counts

Airborne radiometric survey 1969
 A. G. Darney, R. L. Grasty
 Exploration Geophysics Division
 Geological Survey of Canada

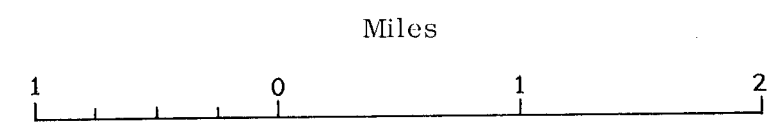

OPEN FILE
 45
 DEC 1970
 GEOLOGICAL SURVEY
 OTTAWA

This map has been reprinted from a scanned version of the original map.
 Reproduction par numérisation d'une carte sur papier