


GEOPHYSICAL SERIES (AIRBORNE GAMMA-RAY SPECTROMETRIC)

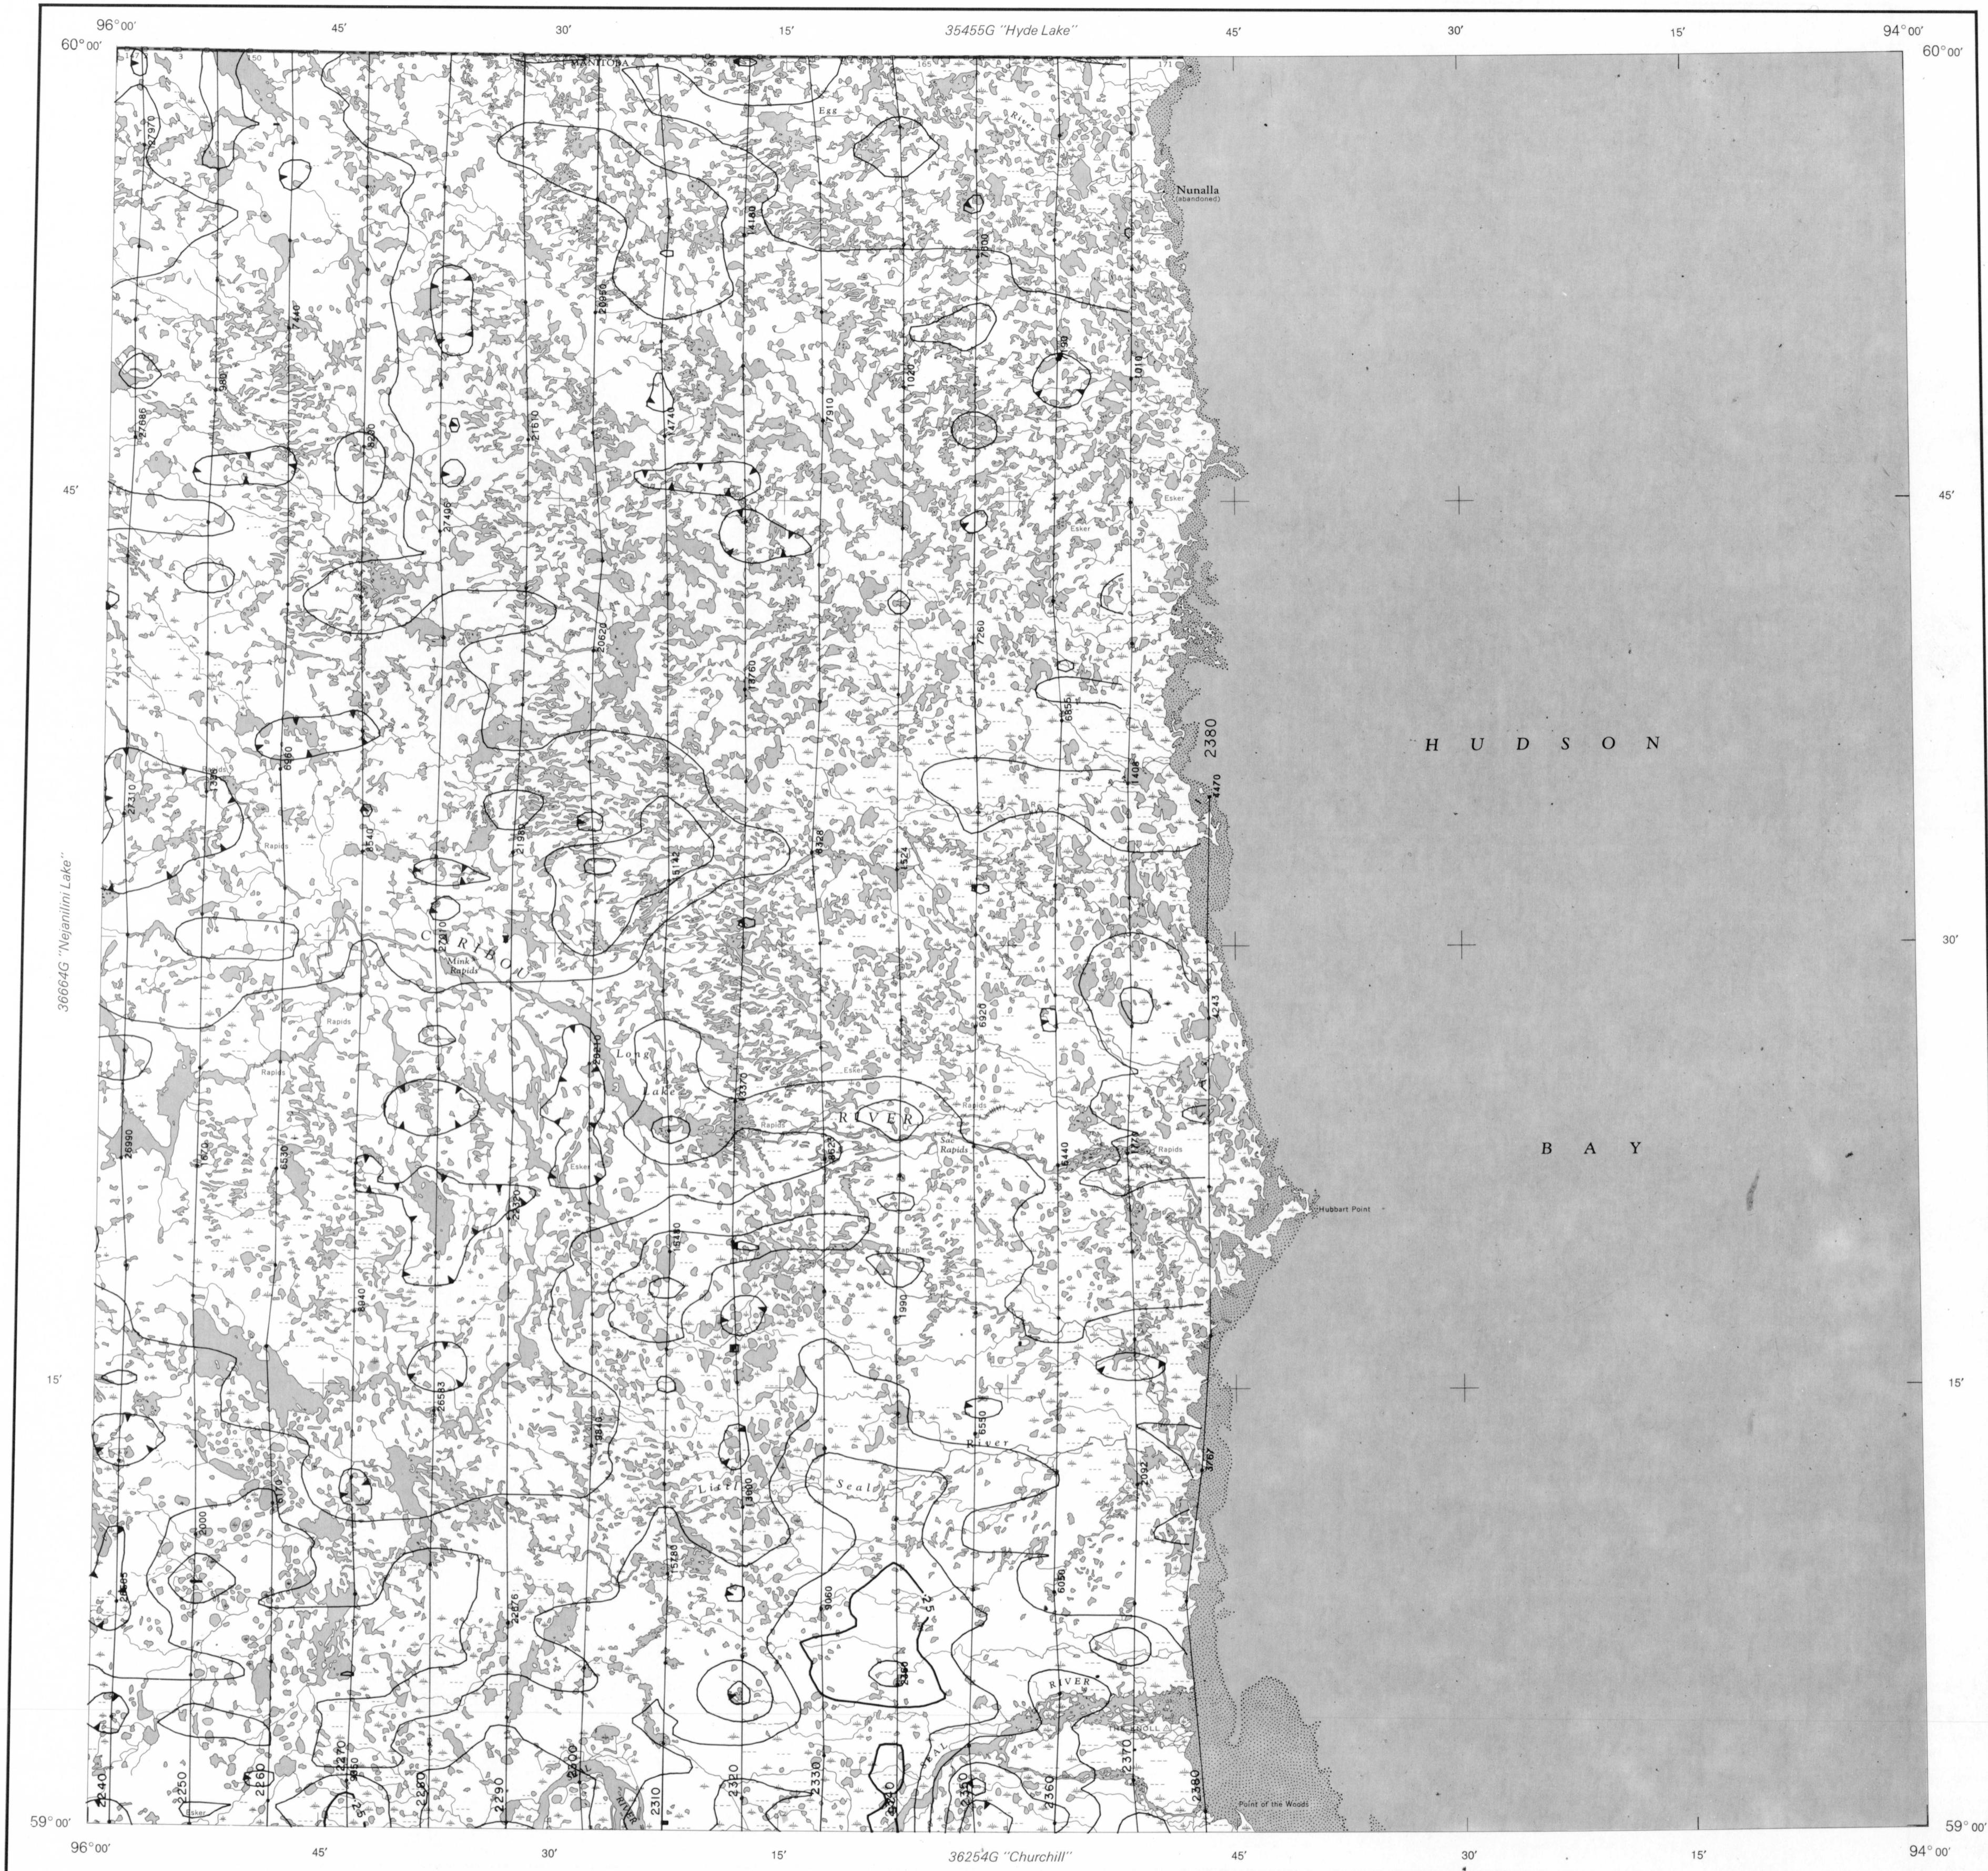

Published, 1977

eU/eTh RATIO
MAP 36354G

CARIBOU RIVER
MANITOBA


Contour Interval..... 0.5
Flight Line and Fiducial
5 MILES 25 0 5 10 15 20 KILOMETERS

COPIES OF THIS MAP MAY BE OBTAINED FROM THE DIRECTOR GENERAL,
GEOLOGICAL SURVEY OF CANADA, OTTAWA.

Uranium Reconnaissance Program Airborne Gamma-Ray
Spectrometer Survey, 1976, flown and compiled by
the consortium of Terra Surveys Ltd., (consortium
directors), Kenting Earth Sciences Ltd., and Northway
Survey Corporation Ltd.

The topography for this series of maps was repro-
duced from 1:250,000 topographical map sheets
published by the Department of Energy, Mines and
Resources, Ottawa.

This map has been reprinted from a
scanned version of the original map
Reproduction par numérisation d'une
carte sur papier

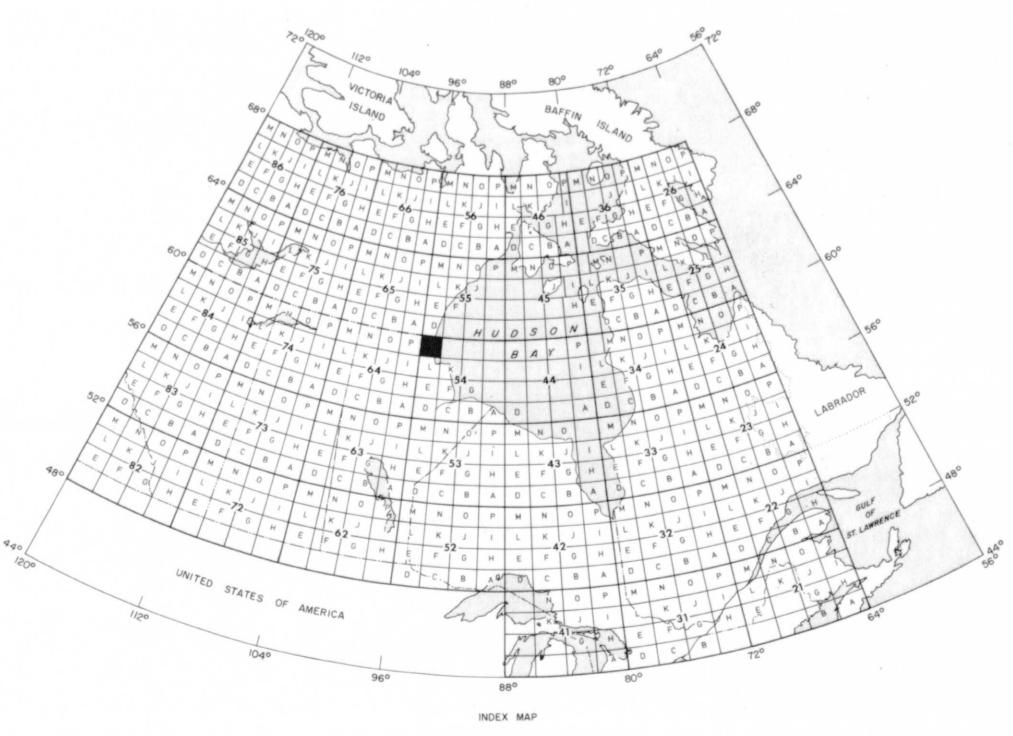

This map was compiled from airborne gamma-ray spectrometer data recorded digitally
along the flight lines shown. The spectrometer, with 50 litres of sodium iodide (NaI(Tl)) de-
tectors, recorded gamma radiation in four channels, with the following energy ranges:

Channel 1 2.42 - 2.82 MeV

Channel 2 1.66 - 1.86 MeV

Channel 3 1.36 - 1.56 MeV

Channel 4 0.40 - 2.82 MeV

Chapters 1 and 3 were centered on the 2.62 MeV Tl¹³⁴ photo peak; the 1.76 MeV Br³⁴
photo peak and on the 1.46 MeV K⁴⁰ photo peak, respectively. Counts were accumulated in
these channels and recorded at one second intervals. The terrain clearance was averaged
and recorded at one second intervals. The detectors were thermally stabilized to minimize
spectral shift. The survey aircraft were flown at a planned survey altitude of 400 feet and at
a ground speed between 190 km/hr and 240 km/hr.

The data were corrected for dead time, atmospheric changes in temperature, back-
ground radiation, spectral scattering and variations of terrain clearance from the planned
survey altitude. Corrected data were converted to 2.42 MeV concentrations of equivalent
thorium, equivalent uranium, and thorium, using conversion factors

determined for each gamma-ray spectrometer used in the survey. The total count rates from
channel 4 were converted to units of radionuclide concentration. The conversion factors
which differed among the 3 aircraft used, are approximately those listed below:

Channel 1 1 ppm eTh = 6 cps

Channel 2 1 ppm eU = 8 to 10 cps

Channel 3 1% K = 70 to 80 cps

Channel 4 1 ur = 140 to 160 cps

Data were smoothed using 40 data points along the flight lines (rejecting values over
water), gridded at 2.2 kilometer intervals along track and 5 kilometer intervals across track,
and contoured.

The contoured values are surface radionuclide concentrations averaged over areas of
approximately 700,000 square meters. These areas generally include some outcrop, over-
burden, swamps and small bodies of water. Consequently the concentrations indicated by
the contour map are generally lower than the concentration in bedrock.

eU/eTh RATIO

MAP 36354G

MANITOBA

54M