



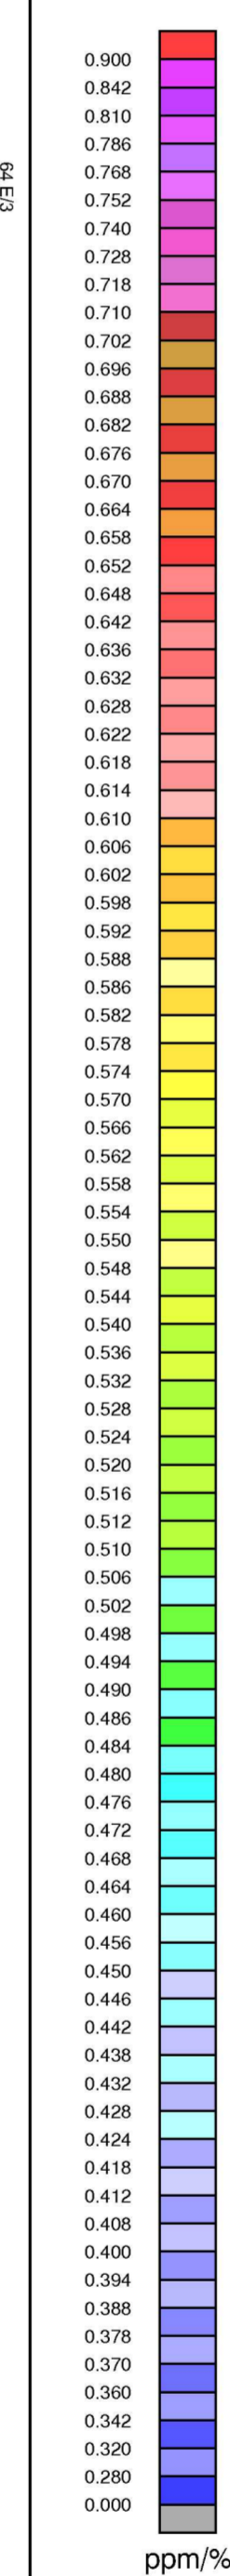

64/E/5
GSC OF 4849
SR OF 2005-3

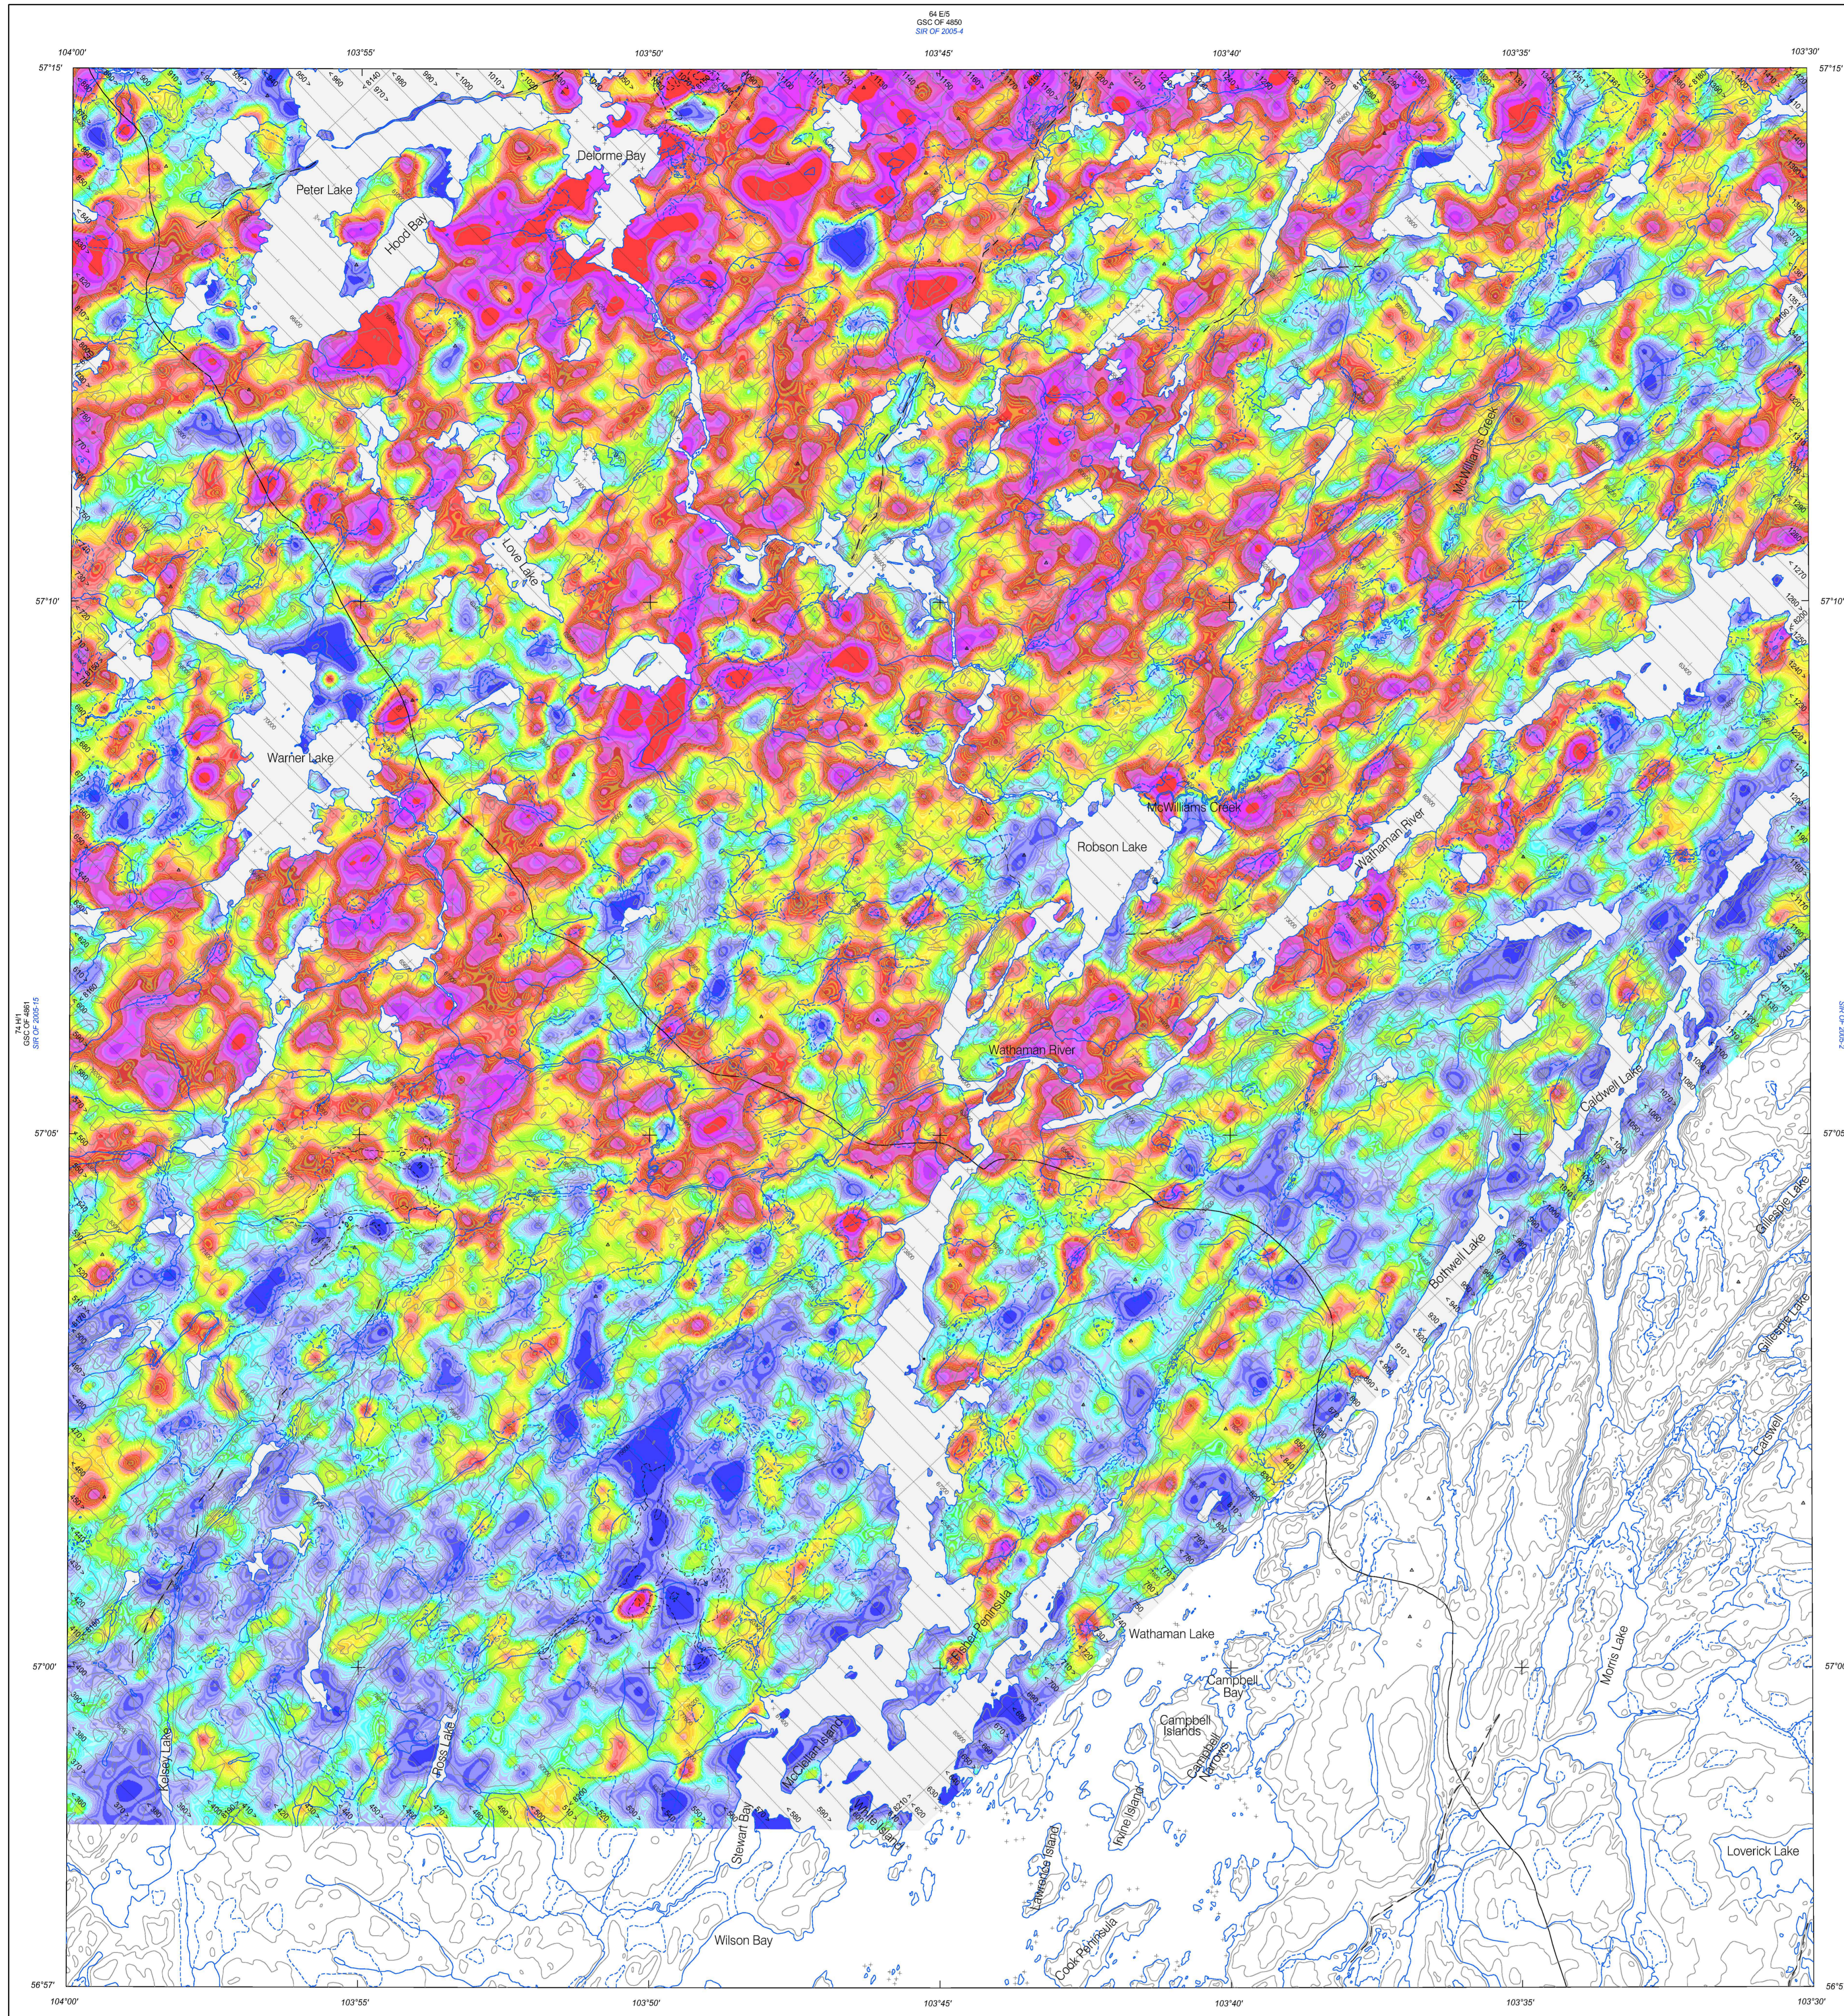

PETER LAKE AND WOLLASTON LAKE AREAS, SASKATCHEWAN

In 2004, Fugro Airborne Surveys completed a multi-sensor airborne geophysical survey of the Peter Lake and Wollaston Lake areas, Saskatchewan, for the Geological Survey of Canada and Saskatchewan Industry and Resources. The purpose of the survey was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The survey was flown over two seasons, from August 31 to September 25, 2003 and July 15 to September 30, 2004 using Geoscan Grand Caravan 300-S aircraft.

Gamma-ray Spectrometric Data
The airborne gamma-ray measurements were made with an Elextron GM200 gamma-ray spectrometer using Rh609 102 x 102 x 400 mm NaI (Tl) crystals. The main detector array consisted of twelve crystals (total volume 50.4 m³). Three crystals (each volume 12.6 m³) were shielded by the main array, were used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least squares algorithm, adjusted the gain for each crystal.
Potassium is measured directly from the 4650 keV gamma-ray photons emitted by ⁴⁰K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (²¹⁴Pb for uranium and ²⁰⁸Tl for thorium). Although these daughters are not down their respective decay chains, they are assumed to be in equilibrium with their parents; thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:
Potassium (40K) 1370 - 1570 keV
Uranium (²¹⁴Pb) 1060 - 1360 keV
Thorium (²⁰⁸Tl) 2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 125 m and an air speed of 210 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windows of interest. During processing, the spectra were energy calibrated, and counts were accumulated in the windows described above. Counts from the radon detector were recorded in a 1800 - 1890 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation. The radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for specific scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variation of temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.
Potassium 90.5 cps/%
Uranium 7.4 cps/ppm
Thorium 5.7 cps/ppm

Corrected data were filtered and interpolated to a 100 m grid for the 1:250 000 scale maps and to a 50 m grid for the 1:50 000 scale maps. The results of an airborne gamma-ray spectrometry survey represent the average surface concentrations that are influenced by varying amounts of outcrop, overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in microgray per hour was produced from measured counts between 400 and 2810 keV.

Magnetic Data
The Grand Caravan aircraft was equipped with a Scintrex CS-2 cesium vapour magnetic sensor mounted in a slingshot to the rear of the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.01 nT. Magnetic interference caused by aircraft maneuvers were compensated using a MAG-ACCS Magnetic Compensation System. Ground stations were recorded using a Fugro CF-1 cesium vapour magnetometer.
After editing the survey data, low-pass filtered digital readings were subtracted from each unfiltered aeromagnetic reading. The intersections of traverse and control lines were identified and the difference in the magnetic values was computed, analyzed and regularly verified to obtain the leveling network. The International Geomagnetic Reference Field was calculated and removed using a field date (2004.05.15) and an altitude of 545 m for each data point. The corrected magnetic data was resampled to a 100 m grid using a minimum curvature algorithm. The first vertical derivative grid was calculated from the corrected data magnetic intensity grid using a FFT based frequency domain filtering algorithm.

Positional Data
The 400 m spaced survey lines were oriented southeast - northwest and 4000 m spaced control lines were oriented southwest - northeast. Survey and control line positions and elevations were determined using a S.S. Sprockel Drape software. Positional data were recorded using a Novatel ProPac NR6010 GPS ground station data were combined with airplane GPS data to produce differentially corrected positional data with an accuracy of 2 to 5 m.

Data Presentation
Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using Fugro's HP DesignJet colour plotters.

PLANIMETRIC SYMBOLS


Topographic Contour	
Railway	
Power Line	
Discharge	
Roads	
Flight lines, Rowal	



NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOLOGICAL MAP INDEX

64E/5	64E/6	64E/7	64E/8	64E/9	64E/10	64E/11	64E/12	64E/13	64E/14	64E/15	64E/16	64E/17	64E/18	64E/19	64E/20
SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3	SR OF 2005-3


This airborne geophysical survey and the production of this map were funded by the Government of Saskatchewan's Mineral Exploration Incentive Program.

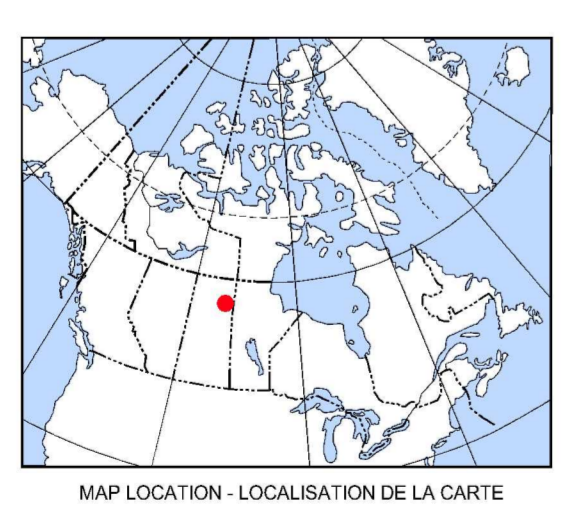

**GEOPHYSICAL SERIES - 64E/4 - ROBSON LAKE
SASKATCHEWAN**

URANIUM / POTASSIUM MAP

Scale 1:50 000 - Echelle 1/50 000



UNIVERSITY OF TORONTO LIBRARY
North American Datum 1983
© The Ministry of Crown Rights of Canada 2005
Digitized topographic base information provided by Saskatchewan Industry and Resources.

OPEN FILE DOSSIER PUBLIC 4849
2005
SHEET 6 OF 10
FEUILLE 6 OF 10

Open file are products that have not gone through the GSC formal publication process.
Les documents publiés sont des produits qui n'ont pas été soumis au processus officiel de publication de la GSC.

SASKATCHEWAN INDUSTRY and RESOURCES
OPEN FILE 2005-3
SHEET 6 OF 10

**URANIUM / POTASSIUM MAP
ROBSON LAKE
SASKATCHEWAN
NTS 64E/4**

Recommended citation:
Ford, K.L., Cameron, J.M., Dumont, R., Pothin, J., Shives, R.B.K., Delaney, G., and Blomson, W.
2005. Geophysical Series 64E/4 - Robson Lake, Saskatchewan.
Geological Survey of Canada Open file 4849.
Saskatchewan Industry and Resources Open file 2005-3
Scale 1:50 000