

PETER LAKE and WOLLASTON LAKE AREAS, SASKATCHEWAN

In 2004, Fugro Airborne Surveys completed a multi-sensor airborne geophysical survey of the Peter Lake and Wollaston Lake areas, Saskatchewan, for the Geological Survey of Canada and Saskatchewan Industry and Resources. The purpose of the survey was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The survey was flown over two seasons, from August 31 to September 29, 2003 and July 15 to September 30, 2004 using aCESS Grand Caravan 300S aircraft owned by G.S.C.

Gamma-ray Spectrometric Data

The airborne gamma-ray measurements were made with an EG&G Reticon G4000 gamma-ray spectrometer using fifteen 102 x 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of twelve crystals (total volume 50.4 litres). Three crystals (total volume 12.6 litres), shielded by the main array, were used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least-squares algorithm, adjusted the gain for each crystal.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by ⁴⁰K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (214Bi for uranium and 208Tl for thorium). Although these daughters are far denser than their parent isotopes, they are assumed to be in equilibrium with their parents; thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

Potassium (40K)	1370 - 1570 keV
Uranium (238U)	1660 - 1860 keV
Thorium (232Th)	2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 125 m and an air speed of 210 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windowed data. During processing, the spectra were energy calibrated, and counts were accumulated into the windows described above. Counts from the radon detectors were recorded in a 1660 - 1860 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variations in temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

Potassium	90.5 cps/µg
Uranium	11.4 cps/ppm
Thorium	2.7 cps/ppm

Corrected data were filtered and interpolated to a 100 m grid for the 1:250 000 scale map and to a 50 m grid for the 1:50 000 scale map. The results of an airborne gamma-ray spectrometric survey represent the average surface concentrations that are influenced by varying amounts of organic overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.

Magnetic Data

The Grand Caravan aircraft was equipped with a Scintrex CS-2 cesium vapour magnetic sensor mounted in a single to the rear of the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.01 nT. Magnetic interference caused by aircraft maneuvers were compensated using an RMS AADCII magnetic compensator. Diurnal variations were recorded using a Fugro CF-10000 cesium magnetometer.


After editing the survey data, low pass filtered diurnal readings were subtracted from each unfiltered aeromagnetic reading. The intersections of traverse and control lines were determined and the differences in the magnetic values were computed, analyzed and manually verified to obtain the leveling residuals. The International Geomagnetic Reference Field was calculated and removed using a fixed data (2004.05.15) and an altitude of 545 m for each data point. The corrected magnetic data was interpolated to a 100 m grid using a minimum curvature algorithm. The final vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.

Positional Data

The 400 m spaced survey lines were oriented southeast - northwest and 4000 m spaced control lines were oriented southeast - northeast. Survey and control line positions and elevations were pre-planned using G.S.C. Smooth Drage software. Positional data were recorded using a Novatel Posipak K880T01 GPS ground station data were combined with Fugro GPS data to produce differentially corrected positional data with an accuracy of 2 to 5 m.

Data Presentation

Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using Fugro's HP DesignJet colour plotters.

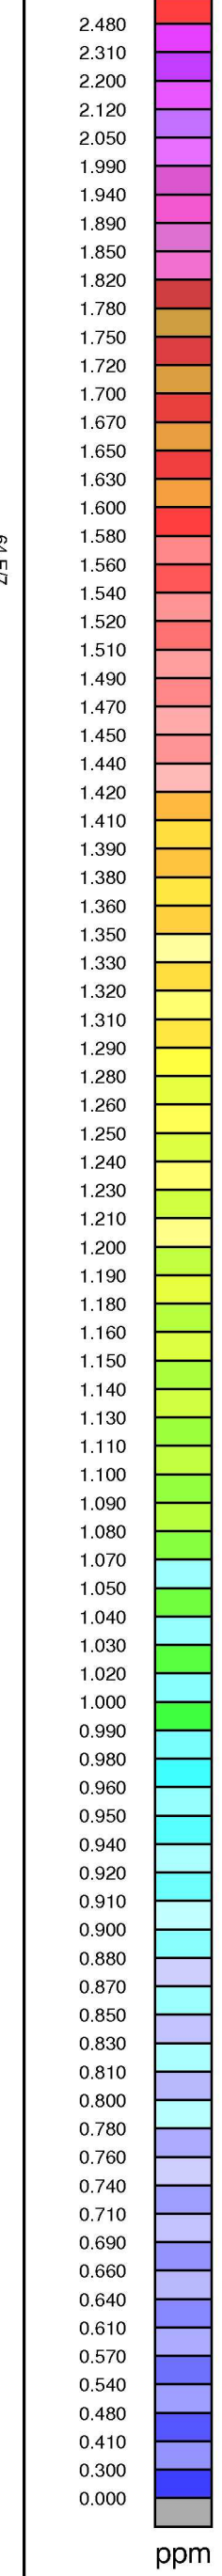

PLANIMETRIC SYMBOLS

Topographic Contour	< 1:100
Railway	
Power line	
Drainage	
Road	
Figureless	1:500

74100	74105	74110	74115	74120
GSC OF 4884	GSC OF 4887	GSC OF 4890	GSC OF 4893	GSC OF 4896
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74125	74130	74135	74140	74145
GSC OF 4899	GSC OF 4902	GSC OF 4905	GSC OF 4908	GSC OF 4911
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74150	74155	74160	74165	74170
GSC OF 4916	GSC OF 4919	GSC OF 4922	GSC OF 4925	GSC OF 4928
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74175	74180	74185	74190	74195
GSC OF 4933	GSC OF 4936	GSC OF 4939	GSC OF 4942	GSC OF 4945
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74200	74205	74210	74215	74220
GSC OF 4950	GSC OF 4953	GSC OF 4956	GSC OF 4959	GSC OF 4962
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74225	74230	74235	74240	74245
GSC OF 4967	GSC OF 4970	GSC OF 4973	GSC OF 4976	GSC OF 4979
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74250	74255	74260	74265	74270
GSC OF 4984	GSC OF 4987	GSC OF 4990	GSC OF 4993	GSC OF 4996
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74275	74280	74285	74290	74295
GSC OF 5001	GSC OF 5004	GSC OF 5007	GSC OF 5010	GSC OF 5013
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11
74300	74305	74310	74315	74320
GSC OF 5020	GSC OF 5023	GSC OF 5026	GSC OF 5029	GSC OF 5032
SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11	SIR OF 2005-11

NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOPHYSICAL MAP INDEX

Recommended citation:
Ford, K.L., Carson, J.M., Dumont, R., Polvin, J., Shives, R.B.K., Delaney, G. and Stimson, W.
2005. Geophysical Series - NTS 64E/6 - Rutherford Lake, Saskatchewan.
Geological Survey of Canada Open File 4851.
Saskatchewan Industry and Resources Open file 2005-5
Scale 1:50 000

This airborne geophysical survey and the production of this map were funded by the Government of Saskatchewan's Mineral Exploration Incentive Program



Natural Resources Canada / Ressources naturelles Canada




MAP LOCATION - LOCALISATION DE LA CARTE

GEOPHYSICAL SERIES - 64E/6 - RUTHERFORD LAKE
SASKATCHEWAN

URANIUM MAP

Scale 1:50 000 - Échelle 1/50 000



Universal Transverse Mercator Projection
North American Datum 1983
Projection transversale universelle de Mercator
Système de référence géodésique nord-américain 1983
© Her Majesty the Queen in Right of Canada 2005
© Sa Majesté la Reine du chef du Canada 2005
Digital topographic base information provided by Saskatchewan Industry and Resources.

OPEN FILE DOSSIER PUBLIC 4851
2005
SHEET 3 OF 10 FEUILLE 3 OF 10

SASKATCHEWAN INDUSTRY AND RESOURCES
OPEN FILE 2005-5
SHEET 3 OF 10

URANIUM MAP
RUTHERFORD LAKE
SASKATCHEWAN
NTS 64E/6