


1:500 000  
1:500 000  
1:500 000

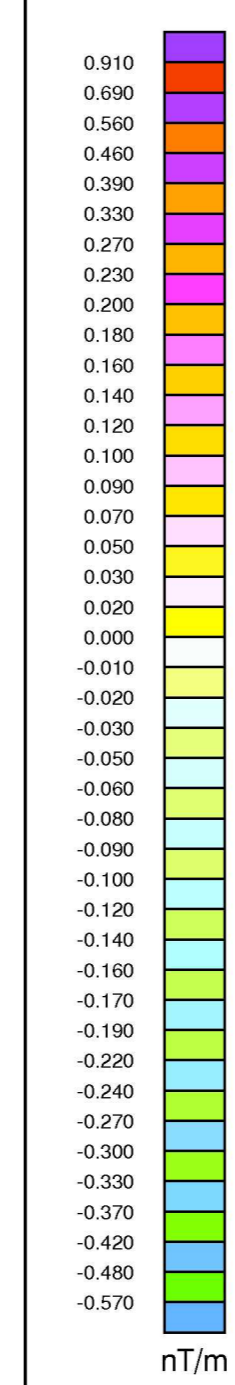

**PETER LAKE and WOLLASTON LAKE AREAS, SASKATCHEWAN**

In 2004, Fugro Airborne Surveys completed a multi-sensor airborne geophysical survey of the Peter Lake and Wollaston Lake areas, Saskatchewan, for the Geological Survey of Canada and Saskatchewan Industry and Resources. The purpose of the survey was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The survey was flown over two seasons, from August 31 to September 29, 2003 and July 15 to September 30, 2004 using Cessna Grand Caravan 440B aircraft @ GSCA.

**Gamma-ray Spectrometric Data**

The airborne gamma-ray measurements were made with an Eggenstrom GR800 gamma-ray spectrometer using fifteen 102 x 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of twelve crystals (total volume 50.4 litres). Three crystals (total volume 12.6 litres), shielded by the main array, were used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least-squares algorithm, adjusted the gain for each crystal.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by <sup>40</sup>K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (214Pb for uranium and 208Tl for thorium). Although these daughters are far denser than their respective parent isotopes, they are assumed to be in equilibrium with their parents; thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

Potassium (40K) 1370 - 1570 keV  
Uranium (238U) 1860 - 1860 keV  
Thorium (232Th) 2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 125 m and an air speed of 210 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windowed data. During processing, the spectra were energy calibrated, and counts were accumulated into the windows described above. Counts from the radon isotopes were recorded in a 1860 - 1860 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variations in temperature and pressure were made prior to conversion of ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

Potassium 90.5 cps/μg  
Uranium 11.4 cps/ppm  
Thorium 2.7 cps/ppm

Corrected data were filtered and interpolated to a 100 m grid for the 1:250 000 scale map and to a 50 m grid for the 1:500 000 scale map. The results of an airborne gamma-ray spectrometer survey represent the average surface concentrations that are influenced by varying amounts of organic overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.

**Magnetic Data**

The Grand Caravan aircraft was equipped with a Scintrex CS-2 cesium vapour magnetic sensor mounted in a sledge to the rear of the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.01 nT. Magnetic interference caused by aircraft maneuvers were compensated using an RMS AADCII Magnetic compensator. Diurnal variations were recorded using a Fugro CF-1 cesium vapour magnetometer.

After editing the survey data, low pass filtered diurnal readings were subtracted from each unfiltered aeromagnetic reading. The intersections of traverse and control lines were determined and the differences in the magnetic values were computed, analyzed and manually verified to obtain the leveling differences. The International Geomagnetic Reference Field was calculated and removed using a field data (20040615) and an altitude of 545 m for each data point. The corrected magnetic data was interpolated to a 100 m grid using a minimum curvature algorithm. The first vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.

**Positional Data**

The 400 m spaced survey lines were oriented southeast - northwest and 4000 m spaced control lines were oriented southeast - northeast. Survey and control line positions and elevations were pre-planned using G.S.C. Smooth Drape software. Positional data were recorded using a Novatel Pospak NR60101. GPS ground station data were combined with ground GPS data to produce differentially corrected positional data with an accuracy of 2 to 3 m.

**Data Presentation**

Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using Fugro's HP DesignJet colour plotters.

**PLANIMETRIC SYMBOLS**

Topographic Contour	
Railway	
Power line	
Drainage	
Roads	
Figures: 64504	



**NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOGRAPHICAL MAP INDEX**

64M1	64M2	64M3	64M4	64M5	64M6	64M7	64M8	64M9	64M10
64N1	64N2	64N3	64N4	64N5	64N6	64N7	64N8	64N9	64N10
64O1	64O2	64O3	64O4	64O5	64O6	64O7	64O8	64O9	64O10
64P1	64P2	64P3	64P4	64P5	64P6	64P7	64P8	64P9	64P10
64Q1	64Q2	64Q3	64Q4	64Q5	64Q6	64Q7	64Q8	64Q9	64Q10
64R1	64R2	64R3	64R4	64R5	64R6	64R7	64R8	64R9	64R10
64S1	64S2	64S3	64S4	64S5	64S6	64S7	64S8	64S9	64S10
64T1	64T2	64T3	64T4	64T5	64T6	64T7	64T8	64T9	64T10
64U1	64U2	64U3	64U4	64U5	64U6	64U7	64U8	64U9	64U10
64V1	64V2	64V3	64V4	64V5	64V6	64V7	64V8	64V9	64V10
64W1	64W2	64W3	64W4	64W5	64W6	64W7	64W8	64W9	64W10
64X1	64X2	64X3	64X4	64X5	64X6	64X7	64X8	64X9	64X10
64Y1	64Y2	64Y3	64Y4	64Y5	64Y6	64Y7	64Y8	64Y9	64Y10
64Z1	64Z2	64Z3	64Z4	64Z5	64Z6	64Z7	64Z8	64Z9	64Z10

This airborne geophysical survey and the production of this map were funded by the Government of Saskatchewan's Mineral Exploration Incentive Program

**GEOPHYSICAL SERIES - 74H/16 - POULTON LAKE  
SASKATCHEWAN**  
**MAGNETIC FIRST VERTICAL DERIVATIVE MAP**

Scale 1:50 000 - Échelle 1/50 000

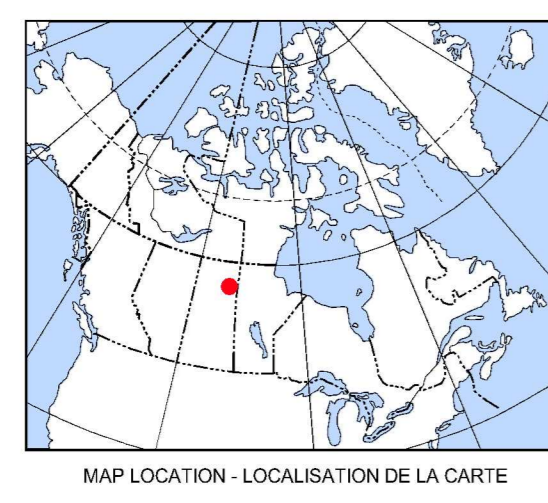

**OPEN FILE DOSSIER PUBLIC 4864**

Les données publiques sont des produits qui sont publiés en vertu de la Loi sur l'accès à l'information.

**2005**

SHEET 10 OF 10  
FEUILLE 10 OF 10

**SASKATCHEWAN INDUSTRY AND RESOURCES**

**OPEN FILE 2005-18**

SHEET 10 OF 10

**MAGNETIC FIRST VERTICAL DERIVATIVE MAP**  
**POULTON LAKE SASKATCHEWAN**  
**NTS 74H/16**

Recommended citation:  
Ford, K.L., Carson, J.M., Dumont, R., Polvin, J., Shives, R.B.K., Delaney, G., and Stimson, W.  
2005. Geophysical Series - NTS 74H/16: Poulton Lake, Saskatchewan.  
Geological Survey of Canada Open File 4864,  
Saskatchewan Industry and Resources Open file 2005-18  
Scale 1:50 000

Universal Transverse Mercator Projection  
North American Datum 1983  
Projection transversale universelle de Mercator  
Système de référence géodésique nord-américain 1983  
© Her Majesty the Queen in Right of Canada 2005  
© Sa Majesté la Reine ou chef du Canada 2005  
Digital topographic base information provided by Saskatchewan Industry and Resources.