

**Gamma-ray Spectrometric Data**  
 The airborne gamma-ray measurements were made with an Epsilon 8820 gamma-ray spectrometer using nine 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of eight crystals (total volume 33.6 litres). One crystal (total volume 4.2 litres), shielded by the main array, was used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least squares algorithm, adjusted the gain for each crystal.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by <sup>40</sup>K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (<sup>214</sup>Pb for uranium and <sup>214</sup>Pb for thorium). Although these daughters are far down their respective decay chains, they are assumed to be in equilibrium with their parents, thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

Potassium ( <sup>40</sup> K)	1360 - 1560 keV
Uranium ( <sup>238</sup> U)	1860 - 1960 keV
Thorium ( <sup>232</sup> Th)	2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 135 m and an air speed of 120 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windowed data. During processing, the spectra were energy calibrated, and counts were accumulated into the windows described above. Counts from the radon detectors were recorded in a 1000 - 1950 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic ray window. The window counts were corrected for dead time, and for background from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variation of temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

Potassium	56.5 cps/nT (2004) 50.0 cps/nT (2005)
Uranium	9.0 cps/ppm (2004) 6.3 cps/ppm (2005)
Thorium	3.7 cps/ppm (2004) 3.2 cps/ppm (2005)

Corrected data were filtered and interpolated to a 100m grid for both the 1:50 000 scale and 1:250 000 scale maps. The results of an airborne gamma-ray spectrometer survey represent the average surface concentrations that are influenced by varying amounts of outcrop, overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanorays per hour was produced from measured counts between 400 and 2810 keV.

**Magnetic Data**  
 The helicopter was equipped with a Sontrex CS-2 cesium vapour magnetic sensor mounted in a bird suspended 30 m below the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.02 nT. Magnetic interferences caused by aircraft maneuvers were compensated using an RMS AAD/CII Magnetic compensator. Diurnal variations and GPS fluctuations were recorded using a Sander Geophysics Ground Station Recording System. The International Geomagnetic Reference Field was calculated daily and removed for each flight. The airborne magnetometer data was IGRF corrected, using the location, altitude and date of each point. The IGRF was calculated using the IGRF 2000 model.

The corrected magnetic data was interpolated to a 100m grid using a minimum curvature algorithm. The first vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.

**Positional Data**  
 Survey line spacing of 500 m and control line spacing of 4000 m was used for the Prairie Creek, Caribou River and Flat River survey blocks. Survey line spacing of 400 m and control line spacing of 2400 m was used for the Sekwi Range survey block. Survey lines were oriented N-S for the Prairie Creek and Caribou River areas. For the Flat River area survey lines were oriented NW-SE and for the Sekwi Range survey lines were oriented SW-NE. Survey and control line positions were pre-planned using Sander Geophysics Limited, Smooth Drapes software. Terrain clearance was monitored by radar altimeter. Position data were recorded using a dual frequency Novatel Millennium system. GPS ground station data were combined with airborne GPS data to produce differentially corrected position data with an accuracy of 2 to 5 m.

**Data Presentation**  
 Colour levels and contours were calculated for each grid and combined with map surround information to create HP R/TL plot files, which were plotted using SGL's HP DesignJet colour plotters.

**Project Funding**  
 The Prairie Creek, Caribou River and Flat River surveys were funded by Parks Canada through the Mineral and Energy Resource Assessment Project. The Sekwi Range survey was funded by the Northwest Territories Geoscience Office. Technical expertise and contract administration were provided by the Radiation Geophysics and Regional Geophysics Sections of the Geological Survey of Canada.

**PLANIMETRIC SYMBOLS**

Topographic Contour	.....
Drainage	.....
Wetland	.....
Permanent Ice	.....
Roads	.....
Trails	.....
Flight Line	.....

**ISOMAGNETIC LINES**

500 nT	.....
100 nT	.....
20 nT	.....
5 nT	.....
Magnetic Depression	.....

**Color Scale (nT):** 400.00, 300.00, 220.00, 180.00, 140.00, 100.00, 75.00, 55.00, 45.00, 35.00, 32.06, 29.29, 26.83, 23.93, 21.62, 20.00, 18.18, 16.79, 15.00, 13.69, 11.95, 10.41, 9.14, 8.21, 7.43, 6.82, 6.32, 5.93, 5.59, 5.28, 5.00, 4.75, 4.52, 4.27, 4.04, 3.82, 3.62, 3.42, 3.23, 3.04, 2.87, 2.70, 2.52, 2.35, 2.18, 2.02, 1.86, 1.70, 1.55, 1.41, 1.25, 1.10, 0.95, 0.80, 0.64, 0.50, 0.35, 0.21, 0.08, -0.06, -0.19, -0.33, -0.48, -0.63, -0.78, -0.95, -1.12, -1.29, -1.46, -1.63, -1.80, -1.95, -2.11, -2.28, -2.45, -2.62, -2.80, -2.99, -3.19, -3.43, -3.74, -4.09, -4.42, -4.75, -5.00, -5.37, -5.67, -5.97, -6.30, -6.63, -7.00, -7.37, -7.80, -8.24, -8.62, -9.08, -9.63, -10.42, -11.29, -12.25, -13.55, -15.00, -15.99, -17.46, -18.59, -20.00, -21.62, -24.27, -27.53, -32.22, -37.86, -45.00, -50.00, -57.81, -70.00, -80.00, -100.00


**Location Map:** Shows the map's location within the Northwest Territories, highlighting the Caribou Pass area.

This airborne geophysical survey and the production of this map were funded by the Northwest Territories Geoscience Office.


### GEOPHYSICAL SERIES - NTS 105 P/10 and 105 P/11 - CARIBOU PASS NORTHWEST TERRITORIES

### RESIDUAL TOTAL MAGNETIC FIELD MAP

Scale 1 : 50 000 - Échelle 1 / 50 000



Natural Resources Canada / Ressources naturelles Canada

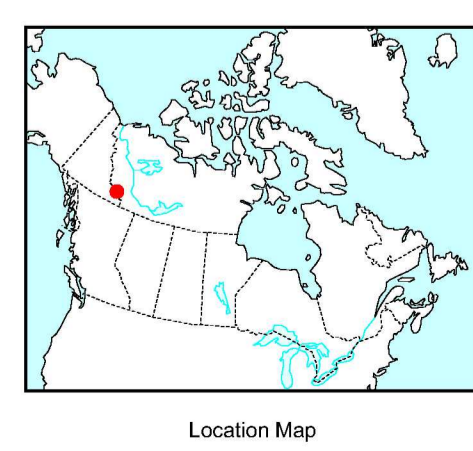

**OPEN FILE DOSSIER PUBLIC 5176**  
 Geological Survey of Canada / Commission géologique du Canada  
 2006  
 SHEET 9 OF 10 / FEUILLET 9 DE 10

**NWT GEOSCIENCE OFFICE CONTRIBUTION 0019**  
 2006  
 SHEET 9 OF 10

Recommended citation:  
 Carson, J.M., Dumont, R., Potvin, J., Buckle, J., Shives, R.B.K., Harvey, B., and Fischer, B.  
 2006. Geophysical Series - NTS 105 P/10 and 105 P/11 - Caribou Pass, Northwest Territories.  
 Geological Survey of Canada, Open File 5176.  
 Northwest Territories Geoscience Office Contribution 0019,  
 scale 1:50 000.

RESIDUAL TOTAL MAGNETIC FIELD MAP  
 CARIBOU PASS  
 NORTHWEST TERRITORIES  
 NTS 105 P/10 and 105 P/11

Digital Topographic Data provided by Geomatics Canada, Natural Resources Canada