

**High Sensitivity Airborne Gamma-Ray Spectrometric and Aeromagnetic Surveys  
Central British Columbia, 2004 - 2006**

In 2004 and 2005, Figure Airborne Surveys completed two multi-season airborne geophysical surveys in the central region of British Columbia for the Geological Survey of Canada, the British Columbia and Yukon Chapter of Mines, Geological Survey of Canada, the British Columbia and Yukon Chapter of Mines, Vancouver First Nations and the industry partners, including Serengeti Resources Inc., Yankee Hat Minerals Ltd., Highland Ventures Corp., DWR Resources Inc., and Artec Resources Ltd. The Geological Survey of Canada provided survey operation and quality control. The purpose of the surveys was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The surveys were flown over two seasons, from September 18 to November 17, 2004 and June 15 to August 6, 2005 using Airbus AS332 and AS350 helicopters, CDFCL and C-FGSC.

**Gamma-ray Spectrometric Data**  
The airborne gamma-ray measurements were made with an Elextronorm GR600 gamma-ray spectrometer using nine 102 x 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of eight crystals (total volume 33.6 litres). One crystal (total volume 4.2 litres) situated by the main array, was used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural potassium peak in each crystal, and using a Gaussian least squares algorithm, adjusted the gain for each crystal.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by <sup>40</sup>K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (214Pb for uranium and 208Tl for thorium). Although these daughters are far down their respective decay chains, they are assumed to be in equilibrium with their parents; thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

- Potassium (<sup>40</sup>K) 1390 - 1560 keV
- Uranium (eU) 890 - 1060 keV
- Thorium (eTh) 2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 120m or 80m depending on the survey area and an air speed of 120km/h. The total potassium, uranium and thorium window counts were derived from the recorded 256 channel spectra. During processing, the spectra were energy calibrated, and counts were accumulated into the windows described above. Counts from the radon detector were recorded in a 1600 - 1800 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for variations of altitude from the planned terrain clearance and for variation of temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

- Potassium 57.3 cps/m<sup>2</sup> (2004) 56.9 cps/m<sup>2</sup> (2005)
- Uranium 6.7 cps/m<sup>2</sup> (2004) 6.4 cps/m<sup>2</sup> (2005)
- Thorium 3.6 cps/m<sup>2</sup> (2004) 3.7 cps/m<sup>2</sup> (2005)


Corrected data were filtered and interpolated to a 100m grid for the 1:250 000 scale maps and to a 50m grid for the 1:20 000 and 1:50 000 scale maps. The results of an airborne gamma-ray spectrometer survey represent the average surface concentration, but are influenced by varying amounts of outcrop, overburden, vegetation cover, soil moisture and surface water. As a result, the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanorays per hour was produced from measured counts between 410 and 2810 keV.

**Magnetic Data**  
The helicopter was equipped with a Scintrex CS-2 cesium vapour magnetic sensor mounted in a 1m<sup>3</sup> high-resolution angle sensor stinger mounted system. The system recorded readings every 0.1 seconds with a noise level of less than 0.01 nT. Magnetic interference caused by aircraft maneuvers were compensated using an FMS AADC2 Magnetic compensator. Diurnal variations and GPS fluctuations were recorded using a Figure 021 base station.

After editing the survey data, the intersections of traverse and control lines were determined and the differences in the magnetic values were computed, analyzed and manually verified to obtain the leveling network. The International Geomagnetic Reference Field was calculated and removed using a fixed date of August 2, 2005 and an altitude of the differentially corrected GPS height for each data point. The corrected magnetic data was interpolated to a 50m grid using a minimum curvature algorithm. The first vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.


**Positional Data**  
Line spacing and direction for survey and control lines were selected for each block to ensure the best intersection of local geological features. Terrain clearance was monitored by radar altimeter. Positional data were recorded using a dual frequency Novatel Millennium system GPS groundstation data were combined with airborne GPS data to produce differentially corrected positional data with an accuracy of 2 to 3 m.

**Data Presentation**  
Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using HP DesignJet colour plotters.

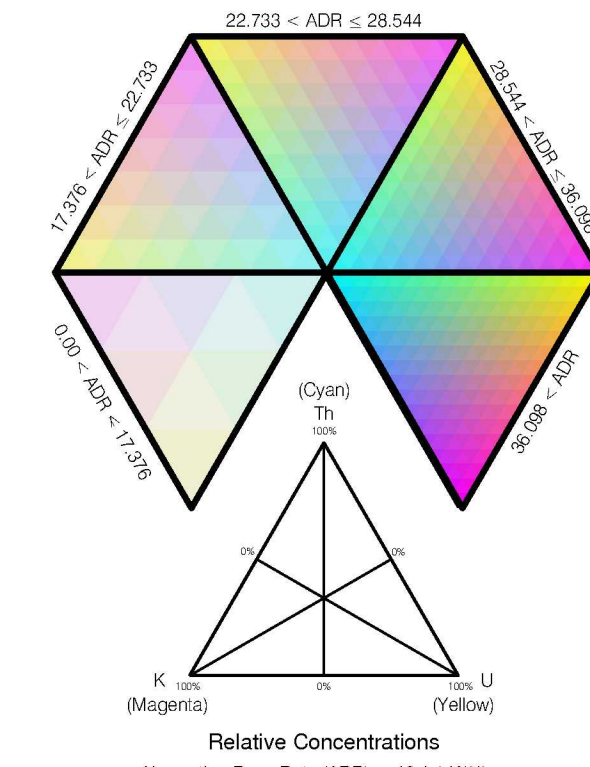

**Planimetric Symbols**


Topographic Contour	.....
Drainage	.....
Roads	.....
Cultures	.....
Railways	.....
Highways, Island	.....

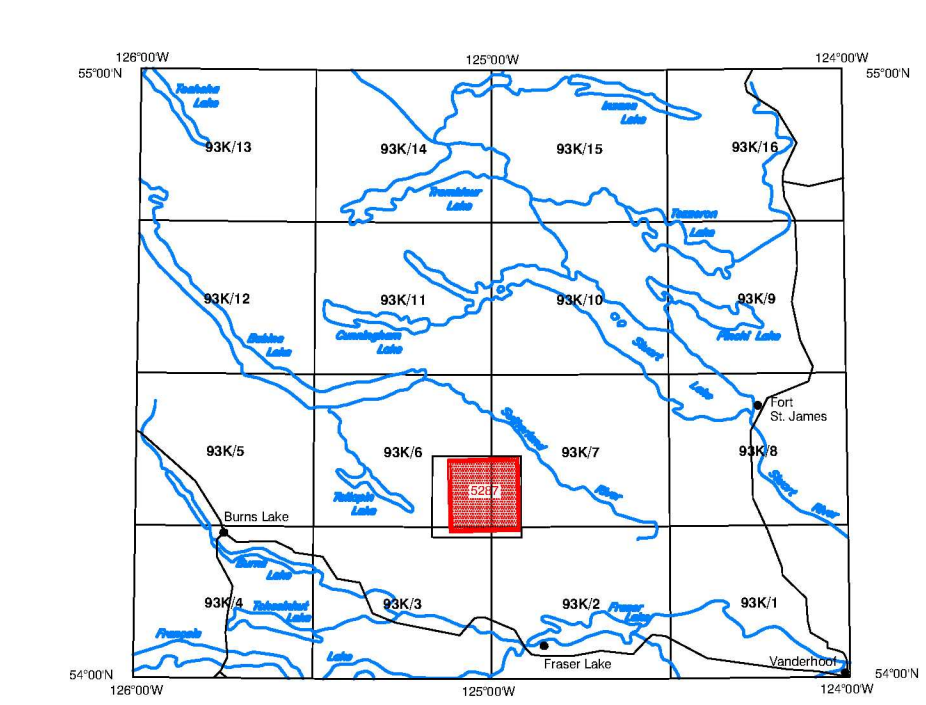

NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOGRAPHICAL MAP INDEX  
SYSTÈME NATIONAL DE RÉFÉRENCE CARTOGRAPHIQUE ET INDEX DES CARTES GÉOGRAPHIQUES

Recommended citation:  
Cowan, J.H., Gwynne, S., Poth, J., Dymek, D.R.K., Harvey, B.A., Bostick, J.L. and Lane, B.  
2006. Geophysical Series: NTS 93K/6, 93K/7, 93K/3, 93K/2 - Taltapin Lake, British Columbia.  
Geological Survey of Canada, Open File 5287.  
scale 1:20 000.

This airborne geophysical survey and the production of this map were funded by the Vancouver First Nation.

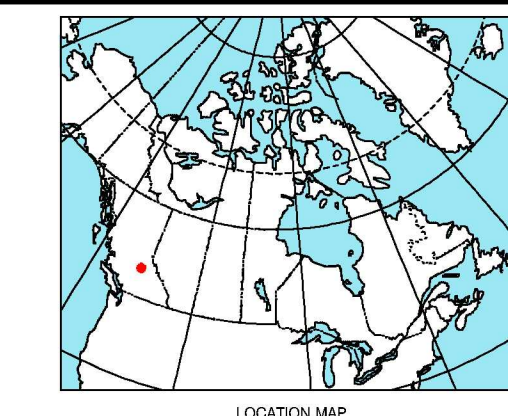


GEOPHYSICAL SERIES - NTS 93K/6, 93K/7, 93K/3, 93K/2 - TALTAPIN LAKE  
BRITISH COLUMBIA

TERNARY RADIOELEMENT IMAGE

Scale 1:20 000 - Échelle 1/20 000  
Kilometres 0.5 1.0 1.5 Kilometres

UNIVERSITY OF TORONTO LIBRARY  
© Her Majesty the Queen in Right of Canada 2006  
Projet de référence géophysique nord-est-ouest, 93K  
© Sa Majesté la Reine du Canada 2006

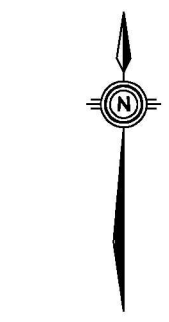

OPEN FILE  
DOSSIER PUBLIC  
5287  
Les données publiques sont  
des produits qui n'ont  
pas été soumis au  
processus officiel de  
validation de la GSC.

TERNARY RADIOELEMENT IMAGE  
TALTAPIN LAKE  
BRITISH COLUMBIA

93K/6, 93K/7, 93K/3, 93K/2