

**High Sensitivity Airborne Gamma-Ray Spectrometric and Aeromagnetic Surveys  
Cree Lake, Saskatchewan**

In 2006, Sander Geophysics Limited completed a multi-sensor airborne geophysical survey of the Cree Lake area, Saskatchewan, for the Geological Survey of Canada and Saskatchewan Industry and Resources. The purpose of the survey was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The survey was flown from July 29 to September 5, 2006 using Britten Norman Islander aircraft, registration C-GSGX.

**Gamma-ray Spectrometric Data**  
The airborne gamma-ray measurements were made with an Exploranium GR820 gamma-ray spectrometer using fourteen 102 x 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of twelve crystals (total volume 50.4 litres). Two crystals (total volume 0.4 litres), shielded by the main array, were used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least squares algorithm, adjusted the gain for each crystal.  
Potassium is measured directly from the 1460 keV gamma-ray photons emitted by <sup>40</sup>K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (<sup>214</sup>Pb for uranium and <sup>214</sup>Pb for thorium). Although these daughters are far down their respective decay chains, they are assumed to be in equilibrium with their parents, thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

Potassium ( <sup>40</sup> K)	1370 1570 keV
Uranium ( <sup>238</sup> U)	1660 1860 keV
Thorium ( <sup>232</sup> Th)	2410 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 125 m and an average air speed of 218 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windowed data. During processing counts were accumulated into the windows described above. Counts from the radon detectors were recorded in a 1000 - 1800 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variations of temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

Potassium	102.4 cps%
Uranium	8.5 cpsppm
Thorium	5.2 cpsppm

Corrected data were filtered and interpolated to a 100m grid for final map production. The results of an airborne gamma-ray spectrometer survey represent the average surface concentrations that are influenced by varying amounts of outcrop, overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.

**Magnetic Data**  
The Islander aircraft was equipped with a Geometrics G-822A cesium vapour magnetic sensor mounted in a stinger to the rear of the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.01 nT. Magnetic interferences caused by aircraft maneuvers were compensated using an RMS-AOCHI magnetic compensator. Diurnal variations were recorded using a cesium vapour magnetometer.  
After editing the survey data, the intersections of traverse and control lines were determined and the differences in the magnetic values were computed, and used to manually verify to obtain the leveling network. The International Geomagnetic Reference Field was calculated and removed using a fixed date (2006, 22, 08) and an altitude of 636 m for each data point. The corrected magnetic data was interpolated to a 100m grid using a minimum curvature algorithm. The first vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.


**Positional Data**  
The 400 m spaced survey lines were oriented to a heading of 105 degrees and the 3000 m spaced control lines were oriented to a heading of 15 degrees. Survey and control line positions and elevations were pre-planned using Sander Geophysics Limited Smooth Drape software. Positional data were recorded using a Novatel EML4 GPS ground station data were combined with airborne GPS data to produce differentially corrected positional data with an accuracy of 2 to 5 m.

**Data Presentation**  
Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using HP DesignJet 1050C colour plotters.

This airborne geophysical survey and the production of this map were funded by the Government of Saskatchewan's Mineral Exploration Incentive Program.

**PLANIMETRIC SYMBOLS**

Topographic Contour	
Drainage	
Wetland	
Permanent Ice	
Roads	
Trails	
Flight Line	

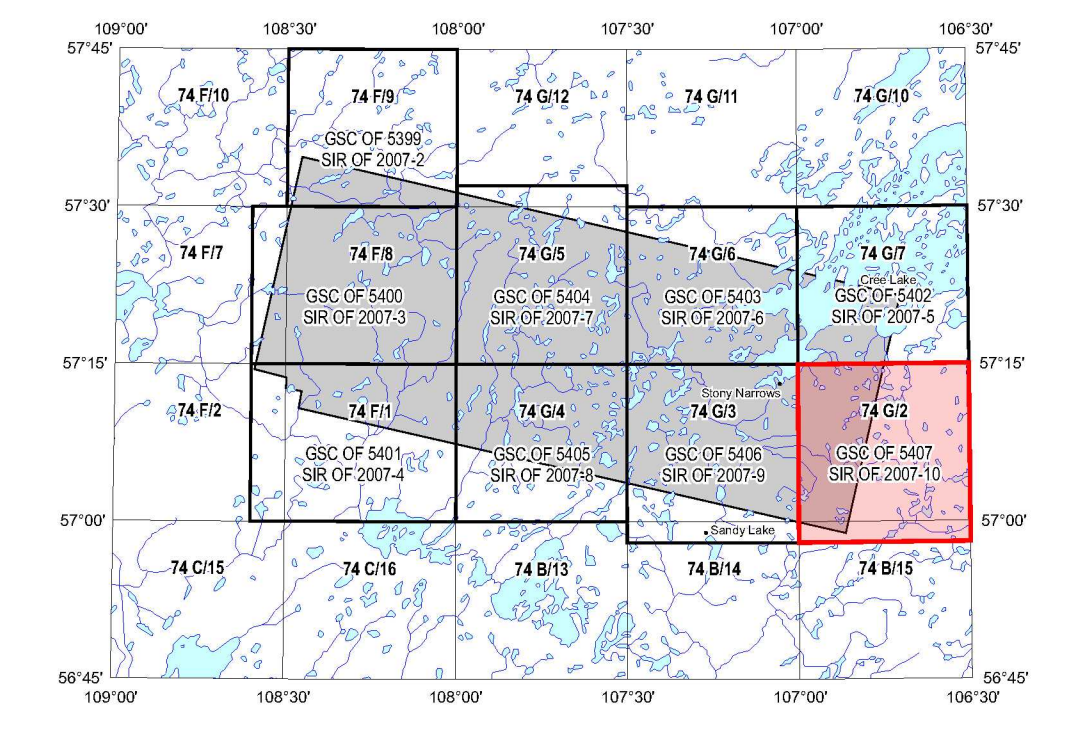

NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOGRAPHICAL MAP INDEX  
SYSTÈME NATIONAL DE RÉFÉRENCE CARTOGRAPHIQUE ET INDEX DES CARTES GÉOGRAPHIQUES

**Saskatchewan Industry and Resources**

Natural Resources Canada / Ressources naturelles Canada

Location Map

**GEOPHYSICAL SERIES**  
**AMERICAN LAKE 74 B/15 and 74 G/2, SASKATCHEWAN**  
**CREE LAKE GEOPHYSICAL SURVEY, SASKATCHEWAN**  
**FIRST VERTICAL DERIVATIVE OF THE MAGNETIC FIELD**

Scale 1 : 50 000 - Échelle 1 / 50 000

km 1 0 2 4

Universal Transverse Mercator Projection  
North American Datum 1983  
Système de référence géométrique nord-américain  
Datum de 1983  
© Her Majesty the Queen in Right of Canada 2007  
© Sa Majesté la Reine du chef du Canada 2007

Projection transversale universelle de Mercator  
Système de référence géométrique nord-américain  
Datum de 1983  
© Sa Majesté la Reine du chef du Canada 2007

Digital Topographic Data provided by Geomatics Canada, Natural Resources Canada

**OPEN FILE DOSSIER PUBLIC 5407**  
GEOLOGICAL SURVEY OF CANADA / COMMISSION GÉOLOGIQUE DU CANADA  
2007

Open file are products that have not gone through the GSC formal production process.  
Les dossiers publics sont des produits qui n'ont pas été soumis au processus officiel de production de la GSC.

**OPEN FILE 2007-10**  
GEOLOGICAL SURVEY OF CANADA / COMMISSION GÉOLOGIQUE DU CANADA  
2007

SHEET 10 OF 10 / FEUILLET 10 DE 10

**Authors:** Buckle, J.L., Carson, J.M., Coyle, M., Ford, K.L., Delaney, G. and Silimon, W.

Data acquisition, compilation and map production by Sander Geophysics Limited, Ottawa, Ontario.  
Contract and project management by the Geological Survey of Canada, Ottawa, Ontario.

Recommended citation:  
Buckle, J.L., Carson, J.M., Coyle, M., Ford, K.L., Delaney, G. and Silimon, W.  
2007. Geophysical series, American Lake 74 B/15 and 74 G/2, Saskatchewan.  
Cree Lake Geophysical Survey, Saskatchewan.  
Geological Survey of Canada, Open File 5407.  
Saskatchewan Industry and Resources, Open File 2007-10,  
scale 1:50 000.

**FIRST VERTICAL DERIVATIVE OF THE MAGNETIC FIELD**

GEOPHYSICAL SERIES  
AMERICAN LAKE 74 B/15 and 74 G/2  
SASKATCHEWAN  
74 B/15 and 74 G/2