

OPEN FILE 7021  
BACKSCATTER STRENGTH AND SHADED SEAFLOOR RELIEF  
**BAY OF FUNDY, SHEET 4**  
OFFSHORE NOVA SCOTIA-NEW BRUNSWICK  
CANADA-UNITED STATES OF AMERICA

Scale 1:50 000/Echelle 1/50 000

Authors: B.J. Todd, J. Shaw, D.R. Parrott, J.E. Hughes Clarke, D. Cartwright, and S.E. Hayward

This map was produced by Natural Resources Canada in co-operation with Fisheries and Oceans Canada

Multibeam backscatter data collected by Canadian Hydrographic Service, 1993, 2006-2009; Geological Survey of Canada, 1999-2003, 2004-2009; and University of New Brunswick, 1993, 1994, 2003-2009

Multibeam backscatter data compiled by Canadian Hydrographic Service, Geological Survey of Canada, and University of New Brunswick, 1993-2010

Digital cartography by P.A. Mulhearn and P. O'Brien, Data Dissemination Division (DCC), and G. Grant, S.E. Hayward and E. Patton, GSC (Atlantic)

Any revisions or additional geographic information known to the user would be welcomed by the Geological Survey of Canada

Digital base map (best area) from data compiled by Geomatics Canada, modified by GSC (Atlantic)

Digital bathymetric contours in metres supplied by Canadian Hydrographic Service and GSC (Atlantic)

Magnetic declination 2011, 17°29'W, decreasing 6.8' annually

Elevations in metres above mean sea level

Depth in metres below mean sea level

UNIVERSITY OF NEW BRUNSWICK  
North American Datum 1983  
Systeme de coordonnées géographiques normalisées, 1983  
© Sa Majesté le Queen in Right of Canada 2011  
Carta hecha en el país por el observador que se designa

This publication is available from the Geological Survey of Canada Information Centre at Fredericton, New Brunswick, or at the following website: [www.gsc.ca](http://www.gsc.ca)

PROJECTION: UTM  
PROJ: UTM  
DATUM: NAD83  
UNIT: METRE  
ZONES: 18N  
PRIMEM: WEST  
SEMI: 500000  
FALSB: 500000  
EASTING: 500000  
NORTHING: 500000  
SCALE: 1:50000  
VERT: METRE  
HORIZONTAL: METRE

### INTRODUCTION

The Bay of Fundy, located on the east coast of Canada between the provinces of New Brunswick and Nova Scotia (Fig. 1), is a macrotidal coastline environment (Arnott et al., 1990) with the highest tides in the world (17 m above to 17 m below MLLW) (Arnott et al., 2006). The map is a product of a series of scientific surveys that have been carried out in the Bay of Fundy since the 1950s. The backscatter strength maps that show seafloor relief of the Bay of Fundy in shaded-relief view and contour relief view are the product of a series of surveys that have been carried out in the Bay of Fundy since the 1950s. The backscatter strength maps that show seafloor relief of the Bay of Fundy in shaded-relief view and contour relief view are the product of a series of surveys that have been carried out in the Bay of Fundy since the 1950s.

### MULTIBEAM-SONAR SURVEYS

The University of New Brunswick, the Canadian Hydrographic Service and the Geological Survey of Canada have carried out multibeam sonar surveys from 1993 to 2009. During this period, the following surveys were conducted using different sonar systems:

- The Canadian Coastal Survey (CCS) Frederickton, New Brunswick, using a Kongsberg EM102 (post-2003) multibeam sonar bathymetric survey system with 111 beams operating at 65 kHz with the manufacturer's standard resolution.
- The CCS Matthews equipped with a Kongsberg EM700 multibeam sonar bathymetric survey system with 200 or 240 beams operating at 70-100 kHz with the resolution specified near the centre of the swath.
- Hydrographic survey vessels Power, Rail, and Honor equipped with Kongsberg EM102 (post-2003) and Kongsberg EM302 (post-2003) multibeam sonar bathymetric survey systems with 190 to 254 beams operating at 300 kHz.

### BACKSCATTER DEFINITION

The backscattering coefficient of a given sediment type (sand, silt, or gravel as defined by Wentworth (1922) and modified by Folk (1954)) at a given frequency is an inherent property of that geological material and varies with angle of incidence of the acoustic beam to the seabed (the grazing angle). This dimensionless coefficient is defined as the ratio of the backscatter intensity (I<sub>back</sub>) on the surface (W<sup>2</sup>) and the effective incident intensity (I<sub>inc</sub>) on the surface (W<sup>2</sup>), divided by the product of the grazing angle (θ) and the sediment type (S):

$$S_{\theta} = \frac{I_{back}}{I_{inc} \sin \theta}$$

Backscatter strength is the logarithmic form of this expression, i.e.,  $10 \log_{10} S_{\theta}$ , with the unit of decibel (dB).

### DATA PROCESSING

Backscatter data processing is treated thoroughly by Hughes Clarke et al. (2006) and is summarized here. Kongsberg EM multibeam sonar systems used throughout the Bay of Fundy survey measure the peak of average backscatter intensity as a voltage on the sonar receiver array. The value is a function of the sonar system and its geometric parameters. To reduce the backscatter intensity to backscatter strength, the following factors must be accounted for:

1. Sonar noise levels, pulse length, and receiver sensitivity.
2. Three-dimensional beam pattern of the transmit and receive arrays.
3. Sonar range and ocean attenuation coefficients of the frequency in question.
4. Application of real-time time-varying gains.
5. Local seabed slopes.

Kongsberg EM multibeam sonar systems use a data reduction scheme that includes corrections for all the factors listed above (Hutchinson, 2000). However, the software used to process the data and the corrections between the design of the sonar hardware and its performance (1, 2, 4), and because of environmental assumptions (3, 5) may not be realistic (Hughes Clarke, 1993). Given the size of many vessels, multibeam sonar systems, and computer software and system hardware upgrades spanning the eight years of the Bay of Fundy survey, comparison of backscatter strength is challenging.

Because the sonar could not be calibrated, an empirical approach through inter-sonar comparisons was undertaken (Hughes Clarke et al., 2006), including:

- uncertainty in the absolute level of backscatter strength for sediment types.
- seasonal tidal length changes associated with vessel and other factors.
- empirical sonar beam pattern corrections that do not account for different sediment types.
- variations in angular response for different sediment types.
- sleep-awake-keep.
- impact of bathymetric attenuation due to sediment water column properties, and
- sonar frequency-dependent backscatter strength from a given sediment type.

### ACKNOWLEDGMENTS

B. Macdonald, M. Langlois, and J. Griffin of the Canadian Hydrographic Service (CHS) organized the multibeam sonar surveys of the Bay of Fundy and oversaw data processing. The Canadian Hydrographic Service provided the data to the Geological Survey of Canada (GSC) for further processing and interpretation. J.E. Hughes Clarke of the Ocean Mapping Group (OMG), Department of Geology and Geomatics Engineering, University of New Brunswick (UNB), supervised the seabed collection of multibeam-sonar data in the 1990s, followed by systematic mapping of the coastal areas of New Brunswick. Multibeam sonar data in Saint John Harbour, New Brunswick, were collected by J. Boyer (GSC), the University of New Brunswick and the Saint John Port Authority, D. Cartwright (OMG, UNB) processed the backscatter strength data under contract to GSC. The authors thank the masters and crew of the survey vessels for their efforts at sea. Geographical Information Systems and cartographic support was provided by S.E. Hayward, E. Patton, J. O'Brien, G. Grant, and J. Mulhearn. The authors thank M.Z. for scientific review of the maps.

### REFERENCES

Ames, C.L., Blakes, D.F., Daborn, G.R., Dymova, R.W., McCann, S.B., and Ral, M.L., 1990. Geomorphology and sedimentology of the Bay of Fundy. Geological Association of Canada Field Guidebook No. 3, 62-82.

Bain, R., 2006. Tides and the earth-moon system, in: Coswell's handbook 2006. Royal Astronomical Society of Canada, 183-187.

Canadian Hydrographic Service, 1993. Natural Resources Chart 1538-A, bathymetry. Department of the Environment, Ottawa, Ontario, scale 1:250 000.

Canadian Hydrographic Service, 1994. Natural Resources Chart 1538-A, bathymetry. Department of the Environment, Ottawa, Ontario, scale 1:250 000.

Canadian Hydrographic Service, 1994. Natural Resources Chart 1538-A, bathymetry. Department of the Environment, Ottawa, Ontario, scale 1:250 000.

Cartwright, D.A., 1986. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1992. The influence of the Bay of Fundy on the Gulf of Maine. *Journal of Physical Oceanography*, 22, 93-104.

Cartwright, D.A., 1993. The influence of the Bay of Fundy on the Gulf of Maine. *Journal of Physical Oceanography*, 23, 93-104.

Cartwright, D.A., 1994. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1995. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1996. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1997. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1998. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 1999. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

Cartwright, D.A., 2000. A review of the physical oceanography of the Bay of Fundy, in: Update of the Marine Environment Research of the Bay of Fundy. Report of the Bay of Fundy Development Committee, D.C. Gordon et al. (eds.), Canadian Technical Report of Fisheries and Aquatic Sciences, 1056, p. 3-30.

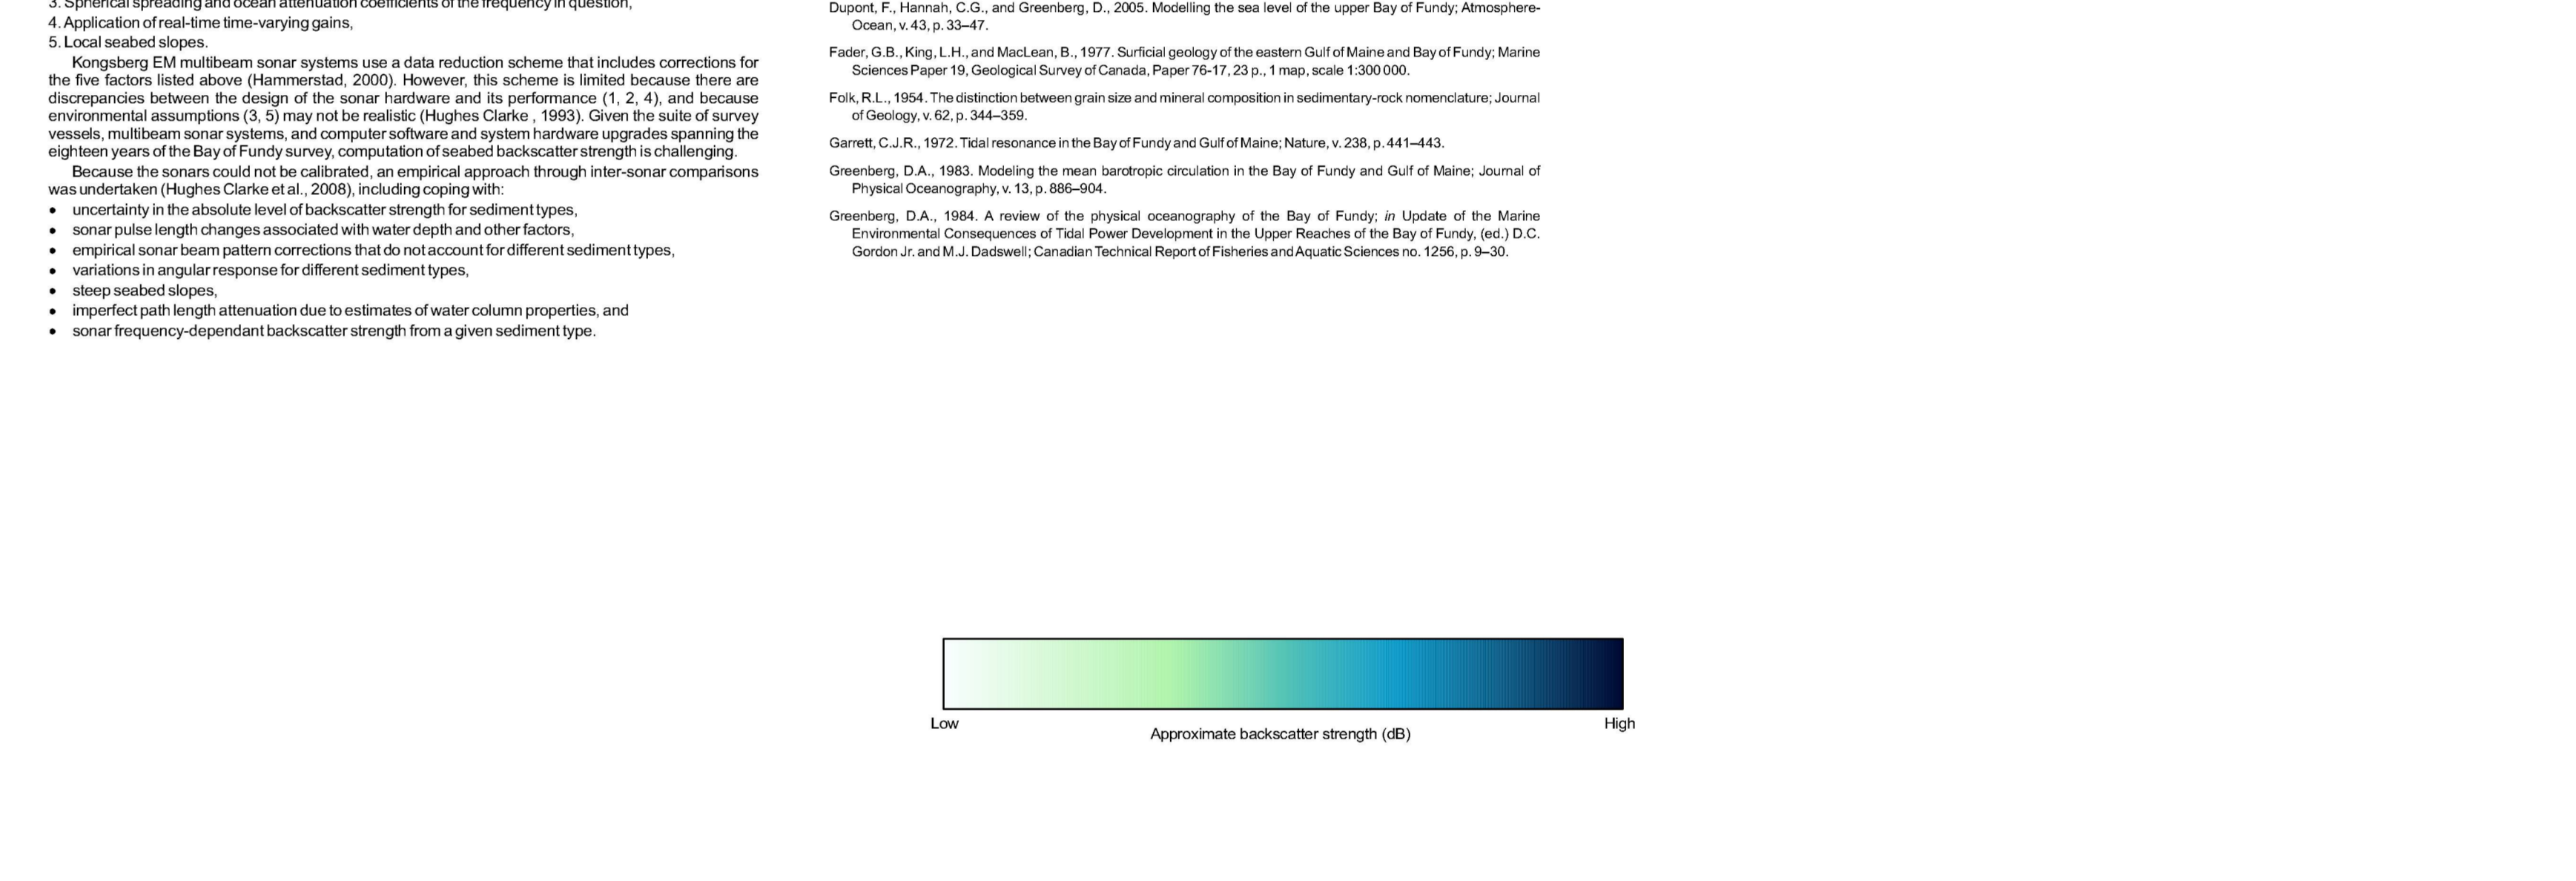


Figure 1. Location map showing 15 000 map sheets covering the Bay of Fundy. Sheet 4 (outlined by red box) is in southeastern Bay of Fundy, encompassing areas adjacent to Grand Manan Island, New Brunswick.

Figure 2. Location map showing the survey extents of multibeam sonar vessels and the year of survey in the Bay of Fundy. Colours refer to multibeam sonar system (year and frequency) listed in Table 1.

Year	Vessel	Multibeam sonar	Frequency (kHz)
1992	CCGS G. Creedy	EM1000	95
1993	CCGS G. Creedy	EM1002	93/98
1994	CCGS G. Creedy	EM1002	93/98
1996	CCGS G. Creedy	EM1002	93/98
1999	CCGS G. Creedy	EM1002	93/98
2002	CCGS Matthews	EM710	71-97
2007	CCGS G. Creedy	EM3002	300
2007	CCGS Matthews	EM3002	300
2008	CCGS G. Creedy	EM1002	93/98
2008	CCGS Matthews	EM710	71-97
2008	CCGS Matthews	EM3002	300
2009	CCGS Matthews	EM710	71-97
2009	CCGS Power	EM3002	300