OPEN FILE 7011 BACKSCATTER STRENGTH AND SHADED SEAFLOOR RELIEF

BAY OF FUNDY, SHEET 14

OFFSHORE NOVA SCOTIA-NEW BRUNSWICK

Scale 1:50 000/Échelle 1/50 000

This map is not to be used for navigational purposes Cette carte ne doit pas être utilisée aux fins de navigation

Système de référence géodésique nord-américain, 1983

© Sa Majesté la Reine du chef du Canada 2011

North American Datum 1983

© Her Majesty the Queen in Right of Canada 2011

Any revisions or additional geographic information known to the user would be welcomed by the Geological Survey of Canada

Digital base map (land area) from data compiled by Geomatics Canada,

modified by GSC (Atlantic)

Digital bathymetric contours in metres supplied by Canadian Hydrographic

Service and GSC (Atlantic)

Magnetic declination 2011,18°04'W, decreasing 7.7' annually

Elevations in metres above mean sea level, except in the west half (NTS 21 H/5)

where elevations are in feet.

Depth in metres below mean sea level

DESCRIPTIVE NOTES

INTRODUCTION

The Bay of Fundy, located on the east coast of Canada between the provinces of Nova Scotia and New Brunswick (Fig. 1) is a macrotidal estuarine embayment (Amos et al., 1980) with the highest tides in the world (17 m according to O'Reilly et al. (2005) and Bishop (2008)). This map is one of a series of seventeen contiguous maps that show seafloor relief of the Bay of Fundy in shaded-relief view and backscatter strength (coded by colour) at a scale of 1:50 000. Backscatter strength is used to remotelysense the geological nature of the substrate (Mitchell and Hughes Clarke, 1994). The backscatter strength maps are based on multibeam-sonar surveys covering 13,010 km² of the seafloor. Water-depth contours generated from the multibeam-sonar data are shown (in white) on the colour-coded backscatter strength image at a depth interval of 10 m. Bathymetric contours (in blue) outside the multibeam survey area, presented at a depth interval of 10 m, are from the Natural Resource Map series (Canadian Hydrographic Service, 1967, 1974a, b, c).

The complete Bay of Fundy backscatter strength map coverage is composed of seventeen adjacent map areas at a scale of 1:50 000 (Fig. 1). This backscatter strength map has a companion seafloor relief

Hull) vessel equipped with a Kongsberg EM1000 (prior to 2003) and a Kongsberg EM1002 (post-2003) multibeam-sonar bathymetric survey system with 111 beams operating at 95 kHz with the

MULTIBEAM-SONAR SURVEYS The University of New Brunswick, the Canadian Hydrographic Service and the Geological Survey of

Canada conducted Bay of Fundy multibeam-sonar surveys from 1992 to 2009. During these eighteen years, nineteen surveys were undertaken using five different vessels equipped with five different multibeam-sonar systems operating across a range of frequencies (Fig. 2, Table 1). The work employed the following survey vessels (also see year-by-year version in Table 1): • the Canadian Coast Guard Ship (CCGS) Frederick G. Creed, a SWATH (Small Waterplane Area Twin

transducer mounted in the starboard pontoon, the CCGS Matthew equipped with a Kongsberg EM710 multibeam-sonar bathymetric survey system with 200 or 400 beams operating at 70–90 kHz with the transducer mounted near the centre of the • hydrographic survey launches *Plover, Pipit,* and *Heron* equipped with Kongsberg EM3000 (prior to 2005) and Kongsberg EM3002 (post-2005) multibeam-sonar bathymetric survey systems with 160 to 254 beams operating at 300 kHz.

The survey systems use a sonar beam over an arc of about 130° across the ship's track and operate by ensonifying a narrow strip of seafloor along track and detecting the seafloor by resolving the returned echo into multiple beams (Courtney and Shaw, 2000). The width of seafloor imaged on each survey line was generally four times the water depth. Line spacing was about two to three times water depth to The Differential Global Positioning System was used for navigation, providing positional accuracy of ±3 m. Survey speeds averaged 12 knots (22.2 km hr¹) on the CCGS *Creed* (and slower on the other survey vessels), resulting in an average data collection rate of about 2.5 km² hr¹ in water depths of 35-70 m. The sound velocity in the ocean was measured during multibeam-sonar data collection and was used to correct the effect of sonar beam refraction. The data were adjusted for tidal variation using tidal measurements and predictions from the Canadian Hydrographic Service. During the 2008 surveys,

et al., 2008) and hydrodynamic tidal models developed by the Canadian Hydrographic Service and Fisheries and Oceans Canada Coastal Oceanography Group (Dupont et al., 2005). The broad intertidal zone in the Bay of Fundy presented a particular surveying challenge to the collection of backscatter strength data. Historically, the intertidal zone was not surveyed due to the danger involved in operating vessels in coastal areas that dry between tides. As part of the multibeamsonar mapping, the intertidal zone was surveyed at high tide using shallow-draft survey vessels, thus overcoming operational challenges associated with deeper draft survey vessels.

vessel elevations were also acquired using a combination of real-time kinematic GPS systems (Church

BACKSCATTER DEFINITION

The backscattering coefficient of a given sediment type (mud, sand, or gravel as defined by Wentworth (1922) and modified by Folk (1954)) at a given frequency is an inherent property of that geological material and varies with angle of incidence of the sonar beam to the seabed (the grazing angle). This dimensionless coefficient S_b is defined as the ratio of power backscattered from the sediment surface P_b per unit solid angle (W steradian⁻¹), divided by the product of the acoustic intensity I_i incident on the surface (W m⁻²) and the effective insonified acoustic area A (m²) (Mitchell and Somers, 1989):

Backscatter strength is the logarithmic form of this expression, i.e., $10\log_{10}S_b$, with the unit of

DATA PROCESSING Backscatter data processing is treated thoroughly by Hughes Clarke et al. (2008) and is summarized

here. Kongsberg EM multibeam sonar systems (used throughout the Bay of Fundy survey) measure the peak or average backscatter intensity as a voltage on the sonar receiver array. The value is a function of the sonar system and its geometric parameters. To reduce the backscatter intensity to backscatter strength, the following factors must be accounted for: 1. Sonar source levels, pulse lengths, and receiver sensitivity, 2. Three-dimensional beam patterns of the transmit and receive arrays, 3. Spherical spreading and ocean attenuation coefficients of the frequency in question,

 Application of real-time time-varying gains, 5. Local seabed slopes. the five factors listed above (Hammerstad, 2000). However, this scheme is limited because there are

discrepancies between the design of the sonar hardware and its performance (1, 2, 4), and because environmental assumptions (3, 5) may not be realistic (Hughes Clarke, 1993). Given the suite of survey vessels, multibeam sonar systems, and computer software and system hardware upgrades spanning the $eighteen \, years \, of \, the \, Bay \, of \, Fundy \, survey, \, computation \, of \, seabed \, backscatter \, strength \, is \, challenging.$ Because the sonars could not be calibrated, an empirical approach through inter-sonar comparisons was undertaken (Hughes Clarke et al., 2008), including coping with:

 uncertainty in the absolute level of backscatter strength for sediment types, • sonar pulse length changes associated with water depth and other factors, • empirical sonar beam pattern corrections that do not account for different sediment types, variations in angular response for different sediment types,

 steep seabed slopes, • imperfect path length attenuation due to estimates of water column properties, and sonar frequency-dependant backscatter strength from a given sediment type.

BACKSCATTER DISTRIBUTION

The backscatter strength data shown on this map, and on the other maps of the Bay of Fundy map series), have been integrated into a single regional coverage from multi-year, multi-source, acoustic confidence in the mean backscatter strength is ±2 dB. Therefore, subtle shifts in backscatter strength observed at the boundaries of the component survey areas (Fig. 2) are artifacts of the data processing and do not necessarily reflect differences in seabed physical properties. Keeping these limitations in mind, subjective interpretation of the backscatter strength data can be undertaken guided by the existing knowledge of the sedimentary facies in the Bay of Fundy (e.g., Swift et al., 1969, 1973; Pelletier and McMullen, 1972; Fader et al., 1977; Todd et al., 2010). The distribution of backscatter strength in the Bay of Fundy provides insight into ocean circulation and related modern sea floor sediment transport processes not apparent in the companion seafloor relief mag (Todd et al., 2011). Ocean circulation in the Bay of Fundy is subject to strong tides (Garrett, 1972; Greenberg, 1983). The general current direction is northeast along the Nova Scotia coast and southwest along the New Brunswick coast with a counterclockwise gyre in the lower bay (Greenberg, 1984). The winnowing and transport of fine-grained sediment under the influence of currents results in remnant coarse-grained deposits. The seabed of central and outer Bay of Fundy and Grand Manan Channel (Sheets 1, 2, 3, 5, 6, 8; see Fig. 1) is dominated by till deposited directly onto bedrock beneath the

Laurentide Ice Sheet. The till is a poorly sorted sediment containing angular fragments of pebble to boulder sized material, and sand-, silt-, and clay-sized sediments in varying proportions. Backscatter strength of the till is high and appears dark blue on this map series. Mud (silt and clay) has accumulated in northwestern Bay of Fundy between Grand Manan Island and the coast of New Brunswick (Sheets 5, 7, 8, 10, 11; see Fig. 1). This depocentre is likely the result of regional current circulation. Backscatter strength of the mud is low and appears light green on this map Sand occurs in broad sheets and as individual bedforms (metres to kilometers in size) throughout much of northeastern Bay of Fundy (Sheets 9, 12–16; see Fig. 1). This well-sorted sediment is mobilized through the action of strong tidal currents. Backscatter strength of the sand is low and appears light green on this map series. Bedrock is exposed at the seabed only rarely in the Bay of Fundy (Todd and Shaw, 2009). Where

ACKNOWLEDGMENTS

bedrock outcrops in Minas Passage (Sheet 16; see Fig. 1), its backscatter strength is high.

B. MacGowan, M. Lamplugh and J. Griffin of the Canadian Hydrographic Service (CHS) organized the multibeam-sonar surveys of the Bay of Fundy and oversaw data processing. The Canadian $Hydrographic \, Service \, provided \, the \, data \, to \, the \, Geological \, Survey \, of \, Canada \, (GSC) \, for \, further \, processing \, decomposition \, for a constant of the expectation of the expectation$ and interpretation. J.E. Hughes Clarke of the Ocean Mapping Group (OMG), Department of Geodesy and Geomatics Engineering, University of New Brunswick (UNB), supervised the earliest collection of multibeam-sonar data in the 1990s, followed by systematic mapping of the coastal areas of New Brunswick. Multibeam-sonar data in Saint John Harbour, New Brunswick, were collected by D. Beaver (GSC), the University of New Brunswick and the Saint John Port Authority. D. Cartwright (OMG, UNB) processed the backscatter strength data under contract to the GSC. The authors thank the masters and crew of the survey vessels for their efforts at sea. Geographical Information Systems and cartographic support was provided by S.E. Hayward, E. Patton, P. O'Regan, G. Grant, and P. Melbourne. The authors thank M.Z. Li for scientific review of the maps.

Amos, C.L., Buckley, D.E., Daborn, G.R., Dalrymple, R.W., McCann, S.B., and Risk, M.J., 1980. Geomorphology and sedimentology of the Bay of Fundy; Geological Association of Canada, Field Trip Guidebook Trip 23, 82 p. Bishop, R., 2008. Tides and the earth-moon system; in Observer's handbook 2009; Royal Astronomical Society of Canadian Hydrographic Service, 1967. Natural Resource Chart 15136-A, bathymetry; Department of the Environment,

Ottawa, Ontario, scale 1:250 000.

Canadian Hydrographic Service, 1974a. Natural Resource Chart 15144-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000. Canadian Hydrographic Service, 1974b. Natural Resource Chart 15146-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000. Canadian Hydrographic Service, 1974c. Natural Resource Chart 15154-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000. Church, I., Hughes Clarke, J.E., Haigh, S., Santos, M., Lamplugh, M., Griffin, J., and Parrott, D.R., 2008. Using globallycorrected GPS solutions to assess the viability of hydrodynamic modeling in the Bay of Fundy; in Proceedings of the

Canadian Hydrographic Conference and National Surveyors Conference, Victoria, British Columbia, Paper 4-2,

Courtney, R.C. and Shaw, J., 2000. Multibeam bathymetry and backscatter imaging on the Canadian continental shelf; Geoscience Canada, v. 27, p. 31–42. Dupont, F., Hannah, C.G., and Greenberg, D., 2005. Modelling the sea level of the upper Bay of Fundy; Atmosphere-Fader G.B., King, L.H., and MacLean, B., 1977, Surficial geology of the e Sciences Paper 19, Geological Survey of Canada, Paper 76-17, 23 p., 1 map, scale 1:300 000. $Folk, R.L., 1954. \, The \, distinction \, between \, grain \, size \, and \, mineral \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, in \, sedimentary-rock \, nomenclature; \, Journal \, composition \, nomenclature; \, Journal \, com$ of Geology, v. 62, p. 344–359. Garrett, C.J.R., 1972. Tidal resonance in the Bay of Fundy and Gulf of Maine; Nature, v. 238, p. 441–443.

Greenberg, D.A., 1983. Modeling the mean barotropic circulation in the Bay of Fundy and Gulf of Maine; Journal of Physical Oceanography, v. 13, p. 886–904. Greenberg, D.A., 1984. A review of the physical oceanography of the Bay of Fundy; *in* Update of the Marine Environmental Consequences of Tidal Power Development in the Upper Reaches of the Bay of Fundy, (ed.) D.C. Gordon Jr. and M.J. Dadswell; Canadian Technical Report of Fisheries and Aquatic Sciences no. 1256, p. 9–30.

Hammerstad, E., 2000. EM Technical Note: Backscattering and Seabed Image Reflectivity; Kongsberg Technical Hughes Clarke, J.E., 1993. The potential for seabed classification using backscatter from shallow water multibeam sources; in Acoustic Classification and Mapping of the Seabed, (ed.) N.G. Pace and D.N. Langhorne; Proceedings of the Institute of Acoustics, v. 15, Part 2, p. 381–388.

Hughes Clarke, J.E., Iwanowska, K.K., Parrott, D.R., Duffy, G., Lamplugh, M., and Griffin, J., 2008. Inter-calibrating multi-source, multi-platform backscatter data sets to assist in compiling regional sediment type maps: Bay of Fundy;

in Proceedings of the Canadian Hydrographic Conference and National Surveyors Conference, Victoria, British Columbia, Paper 8-2, 22 p. Mitchell, N.C. and Hughes Clarke, J.E., 1994. Classification of sea floor geology using multibeam sonar data from the Scotian Shelf; Marine Geology, v. 121, p.143–160.

Mitchell, N.C. and Somers, M.L., 1989. Quantitative backscatter measurements with a long-range side-scan sonar; IEEE Journal of Oceanic Engineering, v. 14, p. 368–374. O'Reilly, C.T., Solvason, R., and Solomon, C., 2005. Where are the world's largest tides?; in 2004 in review, Bedford Institute of Oceanography annual report, (ed.) J. Ryan; Fisheries and Oceans Canada and Natural Resources Canada, Dartmouth, Nova Scotia, p. 44-46.

Pelletier, B.R. and McMullen, R.M., 1972. Sedimentation patterns in the Bay of Fundy and Minas Basin; in Tidal Power, (ed.) T.J. Gray and O.K. Gashus; Plenum Press, New York, p. 153–187. Swift, D.J. P., Pelletier, B.R., Lyall, A.K., and Miller, J.A., 1969. Sediments of the Bay of Fundy-a preliminary report;

Maritime Sediments, v. 5, p. 95–100.

Swift, D.J.P., Pelletier, B.R., Lyall, A.K., and Miller, J.A., 1973. Quaternary sedimentation in the Bay of Fundy; in Earth Science Symposium on Offshore Eastern Canada, (ed.) P.J. Hood; Geological Survey of Canada Paper 71-23, Todd, B.J., and Shaw, J., 2009. International Year of Planet Earth 5, Applications of seafloor mapping on the Canadian Atlantic continental shelf; Geoscience Canada, v. 36, p. 81–94. Todd, B.J., Shaw, J., and Parrott, D.R., 2011. Shaded seafloor relief, Bay of Fundy, Sheet 14, offshore Nova Scotia–New Brunswick,; Geological Survey of Canada, Map 2187A, scale 1:50 000. doi:10.4095/288691. Todd, B.J., Brown, O., Fromm, S.A., Hayward, S.E., Jerosch, K., Kostylev, V.E., Li, M., Manning, D., Meslin, P.,


Middleton, G., Patton, E., Pledge, P.E., Robertson, A., Shaw, J., Spencer, P.L., and Standen, G., 2010. Expedition report CCGS *Hudson* 2009–039: Bay of Fundy; Geological Survey of Canada, Open File 6684, 413 p.


Wentworth, C.K., 1922. Ascale of grade and class terms for clastic sediments; Journal of Geology, v. 30, p. 377–392.


Table 1. Bay of Fundy survey by year, vessel, multibeam sonar instrument, and frequency of operation (adapted from D. Cartwright (unpublished report) and Hughes Clarke et al. (2008)). Note that all multibeam sonars are manufactured by

ongsberg. Colour-coded sonar types correspond with colour codes on Figure 2.				
Year	Vessel	Multibeam sonar	Frequency (kHz)	
1992		EM1000	95	
1993	CCGS Frederick G. Creed			
1994				
1996				
1999				
2002	CSL Heron	EM3000	300	
2006	CCGS Frederick G. Creed	EM1002	93/98	
	CSL Heron	EM3002	300	
2007	CCGS Frederick G. Creed	EM1002	93/98	
	CCGS Matthew	EM710	71–97	
	CSL Heron		300	
	CSL Pipit	EM3002		
	CSL Plover			
2008	CCGS Frederick G. Creed	EM1002	93/98	
	CCGS Matthew	EM710	71–97	
	CSL Heron		300	
	CSL Pipit	EM3002		
	CSL Plover			
2009	CCGS Matthew	EM710	71–97	
	CSL Plover	EM3002	300	

Approximate backscatter strength (dB)

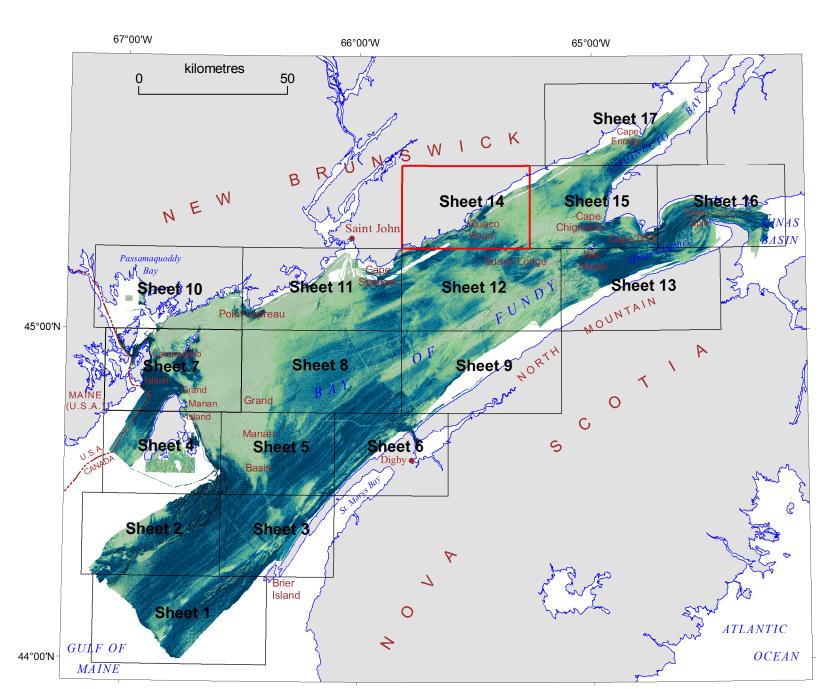



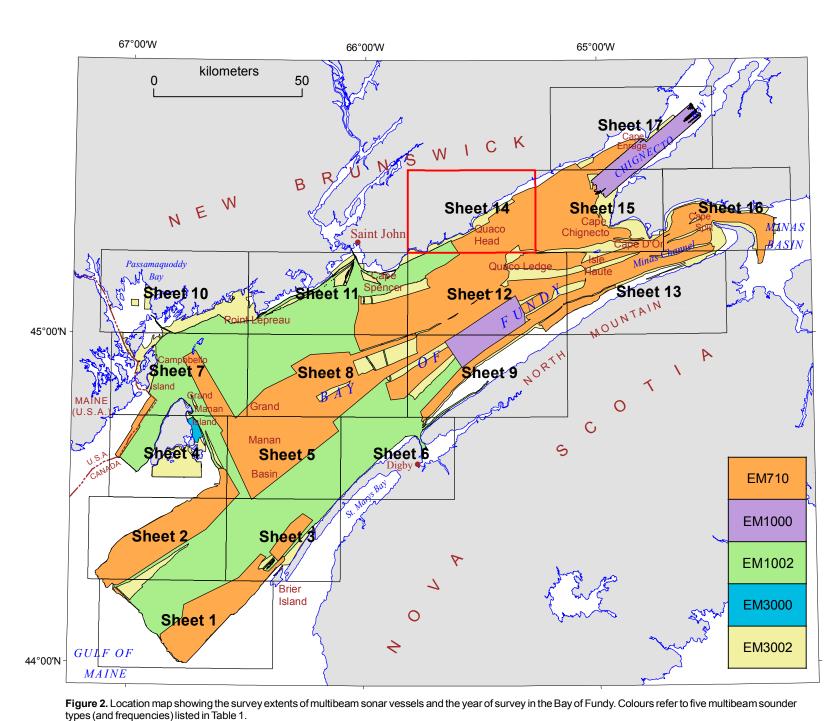

OPEN FILE DOSSIER PUBLIC	Open files are product that have not gone through the GSC form	
7011	publication process.	
GEOLOGICAL SURVEY OF CANADA	Les dossiers publics : des produits qui n'ont	



Authors: B.J. Todd, J. Shaw, D.R. Parrott, J.E. Hughes Clarke, D. Cartwright,

This map was produced by Natural Resources Canada in co-operation with

Multibeam backscatter data collected by Canadian Hydrographic Service,

1993, 2006–2009; Geological Survey of Ćanada, 1999–2003, 2006–2009; and University of New Brunswick, 1993, 1994, 2002–2008

Multibeam backscatter data compiled by Canadian Hydrographic Service,

Digital cartography by P.A. Melbourne and P. O'Regan, Data Dissemination Division (DDD); and G. Grant, S.E. Hayward and E. Patton, GSC (Atlantic)

Geological Survey of Canada, and University of New Brunswick, 1993–2010

Fisheries and Oceans Canada

Recommended citation: Todd, B.J., Shaw, J., Parrott, D.R., Hughes Clarke, J.E., Cartwright, D., and Hayward, S.E., 2011. Backscatter strength and shaded seafloor relief, Bay of Fundy, Sheet 14, offshore Nova Scotia–New Brunswick; Geological Survey of Canada, Open File 7011, scale 1:50 000. doi:10.4095/289521