Government of Canada / Gouvernement du Canada

GEOLOGICAL SURVEY OF CANADA / COMMISSION GÉOLOGIQUE DU CANADA

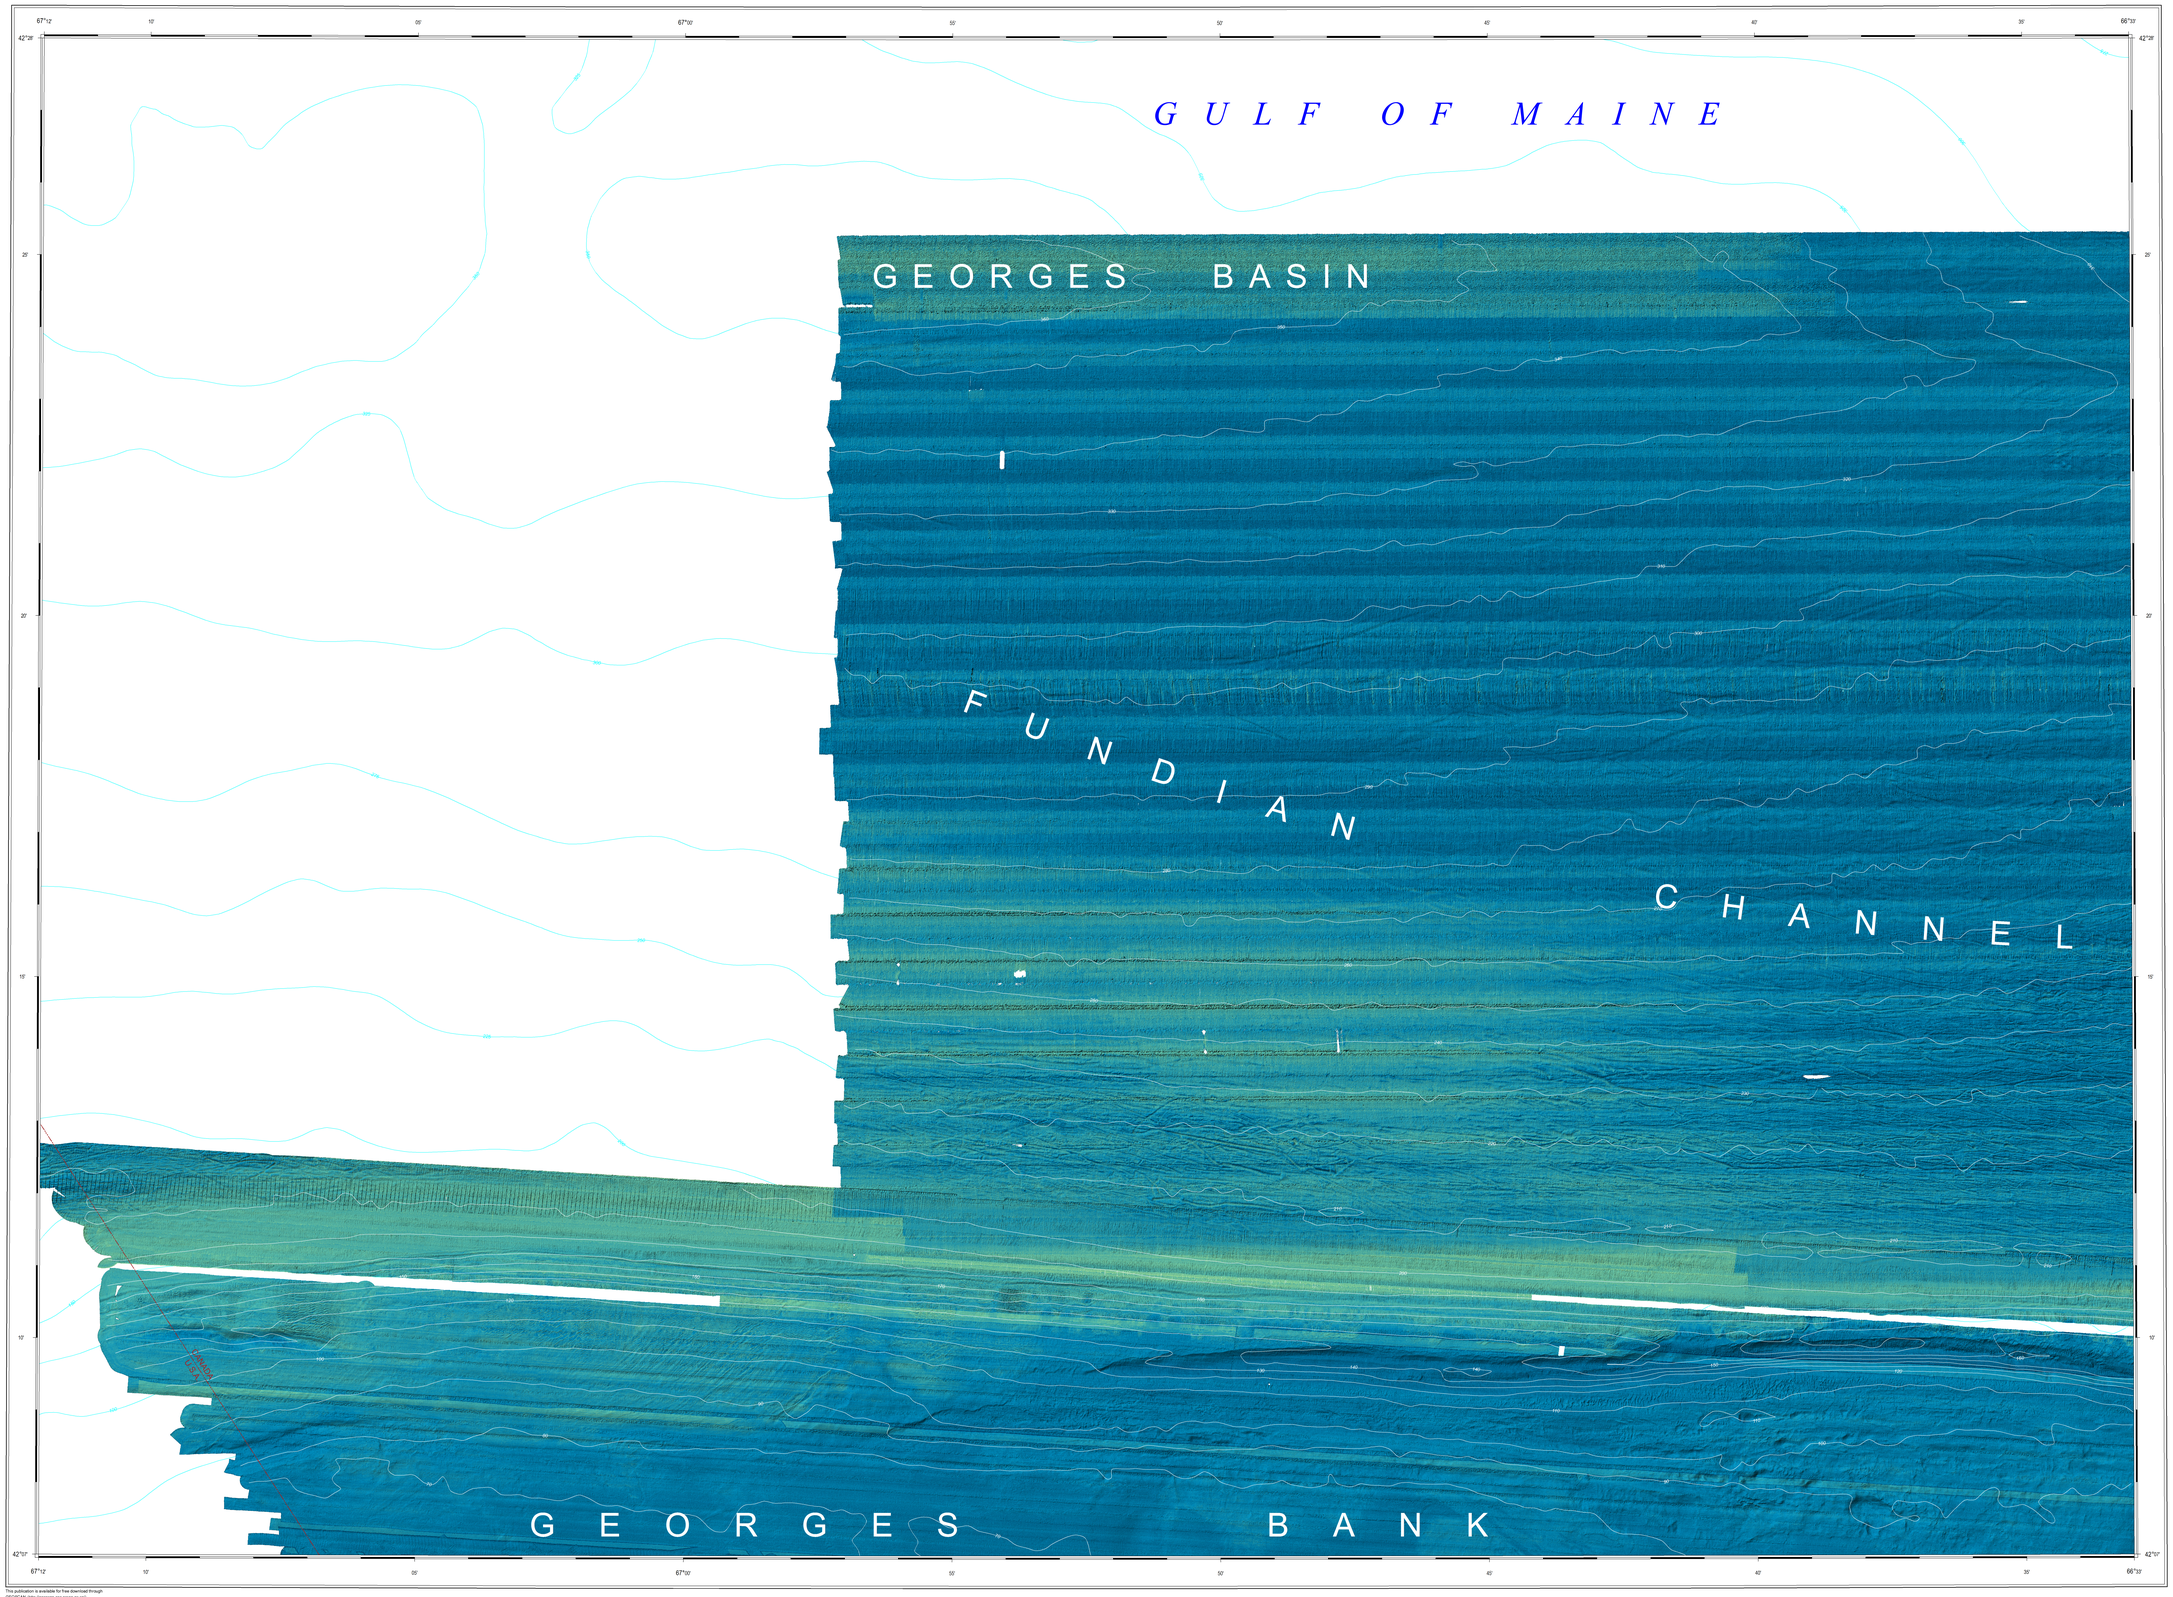

This publication is available for free download through GEOSCAN (http://geoscan.ess.nrcan.gc.ca/).
doi:10.4095/293849

LOCATION MAP

Canada

Authors: B.J. Todd, R.C. Courtney

This map was produced by Natural Resources Canada in co-operation with Fisheries and Oceans Canada

Multibeam bathymetric data collected by Canadian Hydrographic Service, 1997, 1998, 2000, 2002, 2003

Multibeam backscatter data compiled by Geological Survey of Canada, 2004

Cartography by P. O'Regan, Data Dissemination Division (DDD) and Scott Hayward GSC (Atlantic)

OPEN FILE 7251

BACKSCATTER STRENGTH AND SHADED SEAFLOOR RELIEF

GEORGES BANK, FUNDIAN CHANNEL, AND NORTHEAST CHANNEL; SHEET 1

GULF OF MAINE

Scale 1:50 000/Echelle 1/50 000

kilometres 1 0 1 2 3 4 kilomètres

Universal Transverse Mercator Projection
North American Datum 1983

Projection transverse universelle de Mercator
Système de référence géodésique nord-américain, 1983

© Her Majesty the Queen in Right of Canada 2014
This map is not to be used for navigational purposes

© Sa Majesté la Reine du chef du Canada 2014
Cette carte n'est nes pas utilisee pour les fonctionnes nanigationelle

Any revisions or additional bathymetric information known to the user would be welcomed by the Geological Survey of Canada

Digital bathymetric contours in metres supplied by Geological Survey of Canada

Magnetic declination 2014, 16°23'W, decreasing 5.6' annually

Some geographical names subject to revision

Depth in metres below mean sea level



INDEX TO ADJOINING GEOLOGICAL SURVEY OF CANADA MAPS

OPEN FILE
DOSSIER PUBLIC
7251
GEOLOGICAL SURVEY OF CANADA
COMMISSION GÉOLOGIQUE DU CANADA
2014

Publications in this series have not been edited. They are released as submitted by the author.

Les publications de cette série ne sont pas révisées elles sont publiées telles que soumises par l'auteur.

Recommended citation
Todd, B.J. and Courtney, R.C., 2014. Backscatter strength and shaded seafloor relief, Georges Bank, Fundian Channel and Northeast Channel; Sheet 1, Gulf of Maine; Geological Survey of Canada, Open File 7251, scale 1:50 000. doi:10.4095/293849

DESCRIPTIVE NOTES

INTRODUCTION

Georges Bank is a large submarine bank in the Gulf of Maine near the edge of the continental shelf south of Nova Scotia and east of Cape Cod (Fig. 1). The bank is approximately 280 km long and 150 km wide. The international boundary between Canada and the United States transects the bank with the northeast flank in Canada and the southwest flank in the USA.

This map is part of a suite covering Georges Bank, Fundian Channel and Northeast Channel (Todd and Courtney, 2014a, b, c, d, e, f, g, h). Theme maps are the products of a 1999–2000 bathymetric survey that used multibeam sonar systems to map 11,965 km² of the sea floor. Other oceanographic expeditions to the area collected geological and biological data for scientific interpretation. This map sheet shows the sea floor topography of Georges Bank in shaded-relief view and backscatter strength (coded by colour) at a scale of 1:50 000. Topographic contours generated from the multibeam data are shown (in white) on the colour-coded backscatter-strength with an interval of 10 m. Bathymetric contours (in blue) outside the multibeam survey are from the Natural Resource Map series (Canadian Hydrographic Service, 1966, 1967, 1971, 1972). Map 2191A (Todd et al., 2013) shows colour-coded seafloor topography in shaded-relief view.

BACKSCATTER STRENGTH

Details of the multibeam sonar data collection are given by Todd et al. (2013). Backscatter strengths ranging from 0 to –128 decibels (dB) were logged simultaneously with the bathymetric data. To reduce the dynamic range of the recorded data, a partial correction was applied to the backscatter strength values for the effects of transmission loss (attenuation) and beam pattern. Residual errors remain in the backscatter data floor. Backscatter strengths were computed using calibration values for the electronics and transducers at the time of instrument manufacture.

Some features in the backscatter data are artefacts of data collection, environmental conditions during the survey periods and data processing. The orientation of the survey track lines can, in some instances, be identified by faint parallel stripes in the image. These stripes are particularly evident on areas of sea floor having low backscatter strength (light green). Because these artefacts are usually regular and geometric in appearance on the map, the human eye can disregard them and distinguish real patterns of backscatter strength distribution.

Courtney and Shaw (2000) summarized the relationship of backscatter strength to sea floorsediment. Multibeam systems record the mean backscattered signal strength, or mean amplitude, in each returned beam. The mean amplitude of backscattered energy is a complex combination of the amount of incident energy in the downgoing ray with the physical characteristics of the seabed and the shallow subsurface, and is strongly dependent on the angle of incidence of the beam to the seabed. Multibeam sonar systems project sound from an angle of 0° for beams pointing directly down from the survey vessel to angles as high as 75° for the outermost beams. For angles of incidence less than approximately 20°, the signal returned from the seabed is within the specular zone where a reflection from the seabed is recorded from objects larger than the acoustic wavelength (~ 1.6 cm). The amount of energy returned from a specular reflection increases with the acoustic impedance contrast across the water-seabed boundary (acoustic impedance is the product of density and acoustic velocity). At wide beam angles, the signal returned from the seabed is within the backscatter zone where the amount of energy returned from a backscatter reflection increases with increasing surface roughness. At these angles, there can also be an added contribution to the backscatter energy from volume heterogeneity within the subsurface material. For example, acoustic energy penetrates deeper below the seabed into soft, fine-grained material (silt and sand) than it does into hard, course-grained material (gravel). Subsurface course-grained material will contribute to backscattered energy.

No simple relationship exists between backscatter strength and surficial sediment type. However, for incidence angles beyond the specular range, there is a correspondence between backscatter strength and surficial sediment roughness. This correspondence can be utilized for preliminary sediment identification and rudimentary mapping (Mitchell and Hughes Clarke, 1994; Shaw et al., 1997; Todd et al., 1999). Cobbles and boulders (> 64 mm) constitute a locally rough seabed, return high-amplitude backscatter signals (typically –5 to –15 dB), and are shown as light grey to white on this map. Sand waves constitute a locally smooth seabed, return low-amplitude backscatter signals (typically –30 to –50 dB), and are shown as light green to white on this map. Because backscatter is a function of a suite of acoustical variables, it is prudent to interpret backscatter images in conjunction with other geophysical data (seismic reflection profiles and sidescan sonar sonograms), geological samples of sea floor materials and sea floor photographs. This ground truth surveying and accompanying interpretation is an essential component in understanding the surficial geology and sediment transport processes on Georges Bank (Todd and Valentine, 2012).

BACKSCATTER DISTRIBUTION

The distribution of backscatter strength on Georges Bank provides insight into ocean circulation and related modern sea floor sediment transport processes suggested in the bathymetric image(Todd et al. (2013). The mean clockwise ocean circulation around Georges Bank is defined by a strong, jetlike southwest flow of cold, low-salinity water from the Gulf of Maine that passes around the northeast flank, the southern flank, on the Canadian sector of Georges Bank, flow is eastward, southeastward and southward (Bulman et al., 1982; Bulman, 1987; Bulman and Beardsley, 1987). The M₂ semidiurnal tidal currents are the strongest currents on Georges Bank; these currents flow into and out of the Gulf of Maine twice a day as the tide rises and falls. The major axis of the semidiurnal tidal current ellipse is oriented northwest–southeast, across the general topographic trend of Georges Bank. The amplitude of the major axis of the semidiurnal tidal current increases from less than 10 cm s⁻¹ along the southern flank of Georges Bank to more than 100 cm s⁻¹ along the northern edge of the bank. These strong tidal currents cover the top of Georges Bank cause sediment reworking, resuspension, and transport. As discussed in the Backscatter Strength section, the backscatter strength of unconsolidated sediment is a function of the strength of tidal currents.results in remnant coarse-grained gravel lag deposits with high backscatter strength. Transported sand is deposited in bed forms in sand wave fields characterized by low backscatter strength. In some areas, epifauna on the seafloor influence the backscatter strength.

ACKNOWLEDGMENTS

K. Paul of the Canadian Hydrographic Service (CHS) organized the multibeam bathymetric survey of the mouth of Fundian Channel (Northeast Channel). M. Lamplugh and G. Costello (CHS) organized the multibeam bathymetric survey of Georges Bank in cooperation with the Canadian Offshore Scallop Association Industry Mapping Group, D. Beardsley of the Woods Hole Oceanographic Institution, and the Fundian Channel survey was undertaken by Clearwater Fine Foods Inc. The Georges Bank and Fundian Channel maps are based on multibeam sonar data used in agreement with the Canadian Offshore Scallop Association Industry Mapping Group and Clearwater Fine Foods Inc. Multibeam sonar data were processed by CHS and GSC. Processing of the backscatter strength was undertaken with software developed by R.C. Courtney (GSC). We thank the master and crew of the CCGS *Frederick G. Creed* and of the MV *Anne S. Pierce* for their efforts at sea. Geographical Information Systems and cartographic support was provided by P. O'Regan, E. Patton, W.A. Rainey, S. Hayward and S. Hynes. John Shaw undertook scientific review of the map.

REFERENCES

Bulman, B.
1987: Physical processes causing surficial-sediment movement; in Georges Bank, (ed.) R.H. Backus; Cambridge, Massachusetts, Massachusetts Institute of Technology Press, p. 147–162.

Bulman, B. and Beardsley, R.C.
1987: Physical oceanography; in Georges Bank, (ed.) R.H. Backus; Cambridge, Massachusetts, Massachusetts Institute of Technology Press, p. 65–96.

Bulman, B., Beardsley, R.C., Magnell, B., Frye, D., Vermersch, J.A., Schlitz, R., Limeburner, R., Wright, W.R., and Noble, M.A.
1982: Recent observations of the mean circulation on Georges Bank. Journal of Physical Oceanography, v. 12, p. 969–001.

Canadian Hydrographic Service
1966: Natural Resource Chart 15114-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000.
1967: Natural Resource Chart 15114-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000.
1971: Natural Resource Chart 15124-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000.
1972: Natural Resource Chart 15126-A, bathymetry; Department of the Environment, Ottawa, Ontario, scale 1:250 000.

Courtney, R.C. and Shaw, J.
2000: Multibeam bathymetry and backscatter imaging of the Canadian continental shelf; Geoscience Canada, v. 27, p. 31–42.

Mitchell, N.C. and Hughes Clarke, J.E.
1994: Classification of seafloor geology using multibeam sonar data from the Scotian Shelf; Marine Geology, v. 121, p. 143–161.

Shaw, J., Courtney, R.C., and Currie, J.R.
1997: Marine geology of St. George's Bay, Newfoundland: as interpreted from multibeam bathymetry and backscatter data; Geo-Marine Letters, v. 17, p. 188–194.

Todd, B.J. and Courtney, R.C.
2014a: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 2; Geological Survey of Canada, Open File 7250, scale 1:50 000.
2014b: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 3; Geological Survey of Canada, Open File 7249, scale 1:50 000.
2014c: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 4; Geological Survey of Canada, Open File 7248, scale 1:50 000.
2014d: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 5; Geological Survey of Canada, Open File 7247, scale 1:50 000.
2014e: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 6; Geological Survey of Canada, Open File 7246, scale 1:50 000.
2014f: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 7; Geological Survey of Canada, Open File 7245, scale 1:50 000.
2014g: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 8; Geological Survey of Canada, Open File 7244, scale 1:50 000.
2014h: Backscatter strength and sun-illuminated sea floor topography of Georges Bank and Fundian Channel, Gulf of Maine, Sheet 9; Geological Survey of Canada, Open File 7243, scale 1:50 000.

Todd, B.J. and Valentine, P.C.
2012: Chapter 15 Large submarine sand waves and gravel lag substrates on Georges Bank off Atlantic Canada; in Seafloor Geomorphology as Benthic Habitat: GeoHAB Atlas of Seafloor Geomorphic Features and Benthic Habitats, (ed.) P.T. Harris, E.K. Baker; Elsevier, Amsterdam, p. 261–275; doi: 10.1016/B978-0-12-385140-6.00015-3.

Todd, B.J., Valentine, P.C., Shaw, J.
2013: Shaded seafloor relief, Georges Bank, Fundian Channel, and Northeast Channel; sheet 1, Gulf of Maine; Geological Survey of Canada, "A" Series Map 2191A, scale 1:50 000, doi:10.4095/292048.

Todd B.J., Fader G.B.J., Courtney R.C., Pickrill R.A.
1999: Quaternary geology and surficial sediment processes, Browns Bank, Scotian Shelf, based on multibeam bathymetry MarineGeology, v. 162, p.167–216.





Figure 1. Location map shows extent of map sheet in red. The pink shadowing shows the extent of the multibeam sonar coverage. Five-digit numbers refer to Marsden Square System used for Natural Resource Map series at 1:250 000 scale. Blue line shows 200 m isobath.