

Ce document est le produit d'une numérisation par balayage de la publication originale.  
This document was produced by scanning the original publication.

54 B


1:250,000

CANADA


EDITION 1

54 B

Refer to this map as: 54 B EDITION 1 ASE SERIES A 501

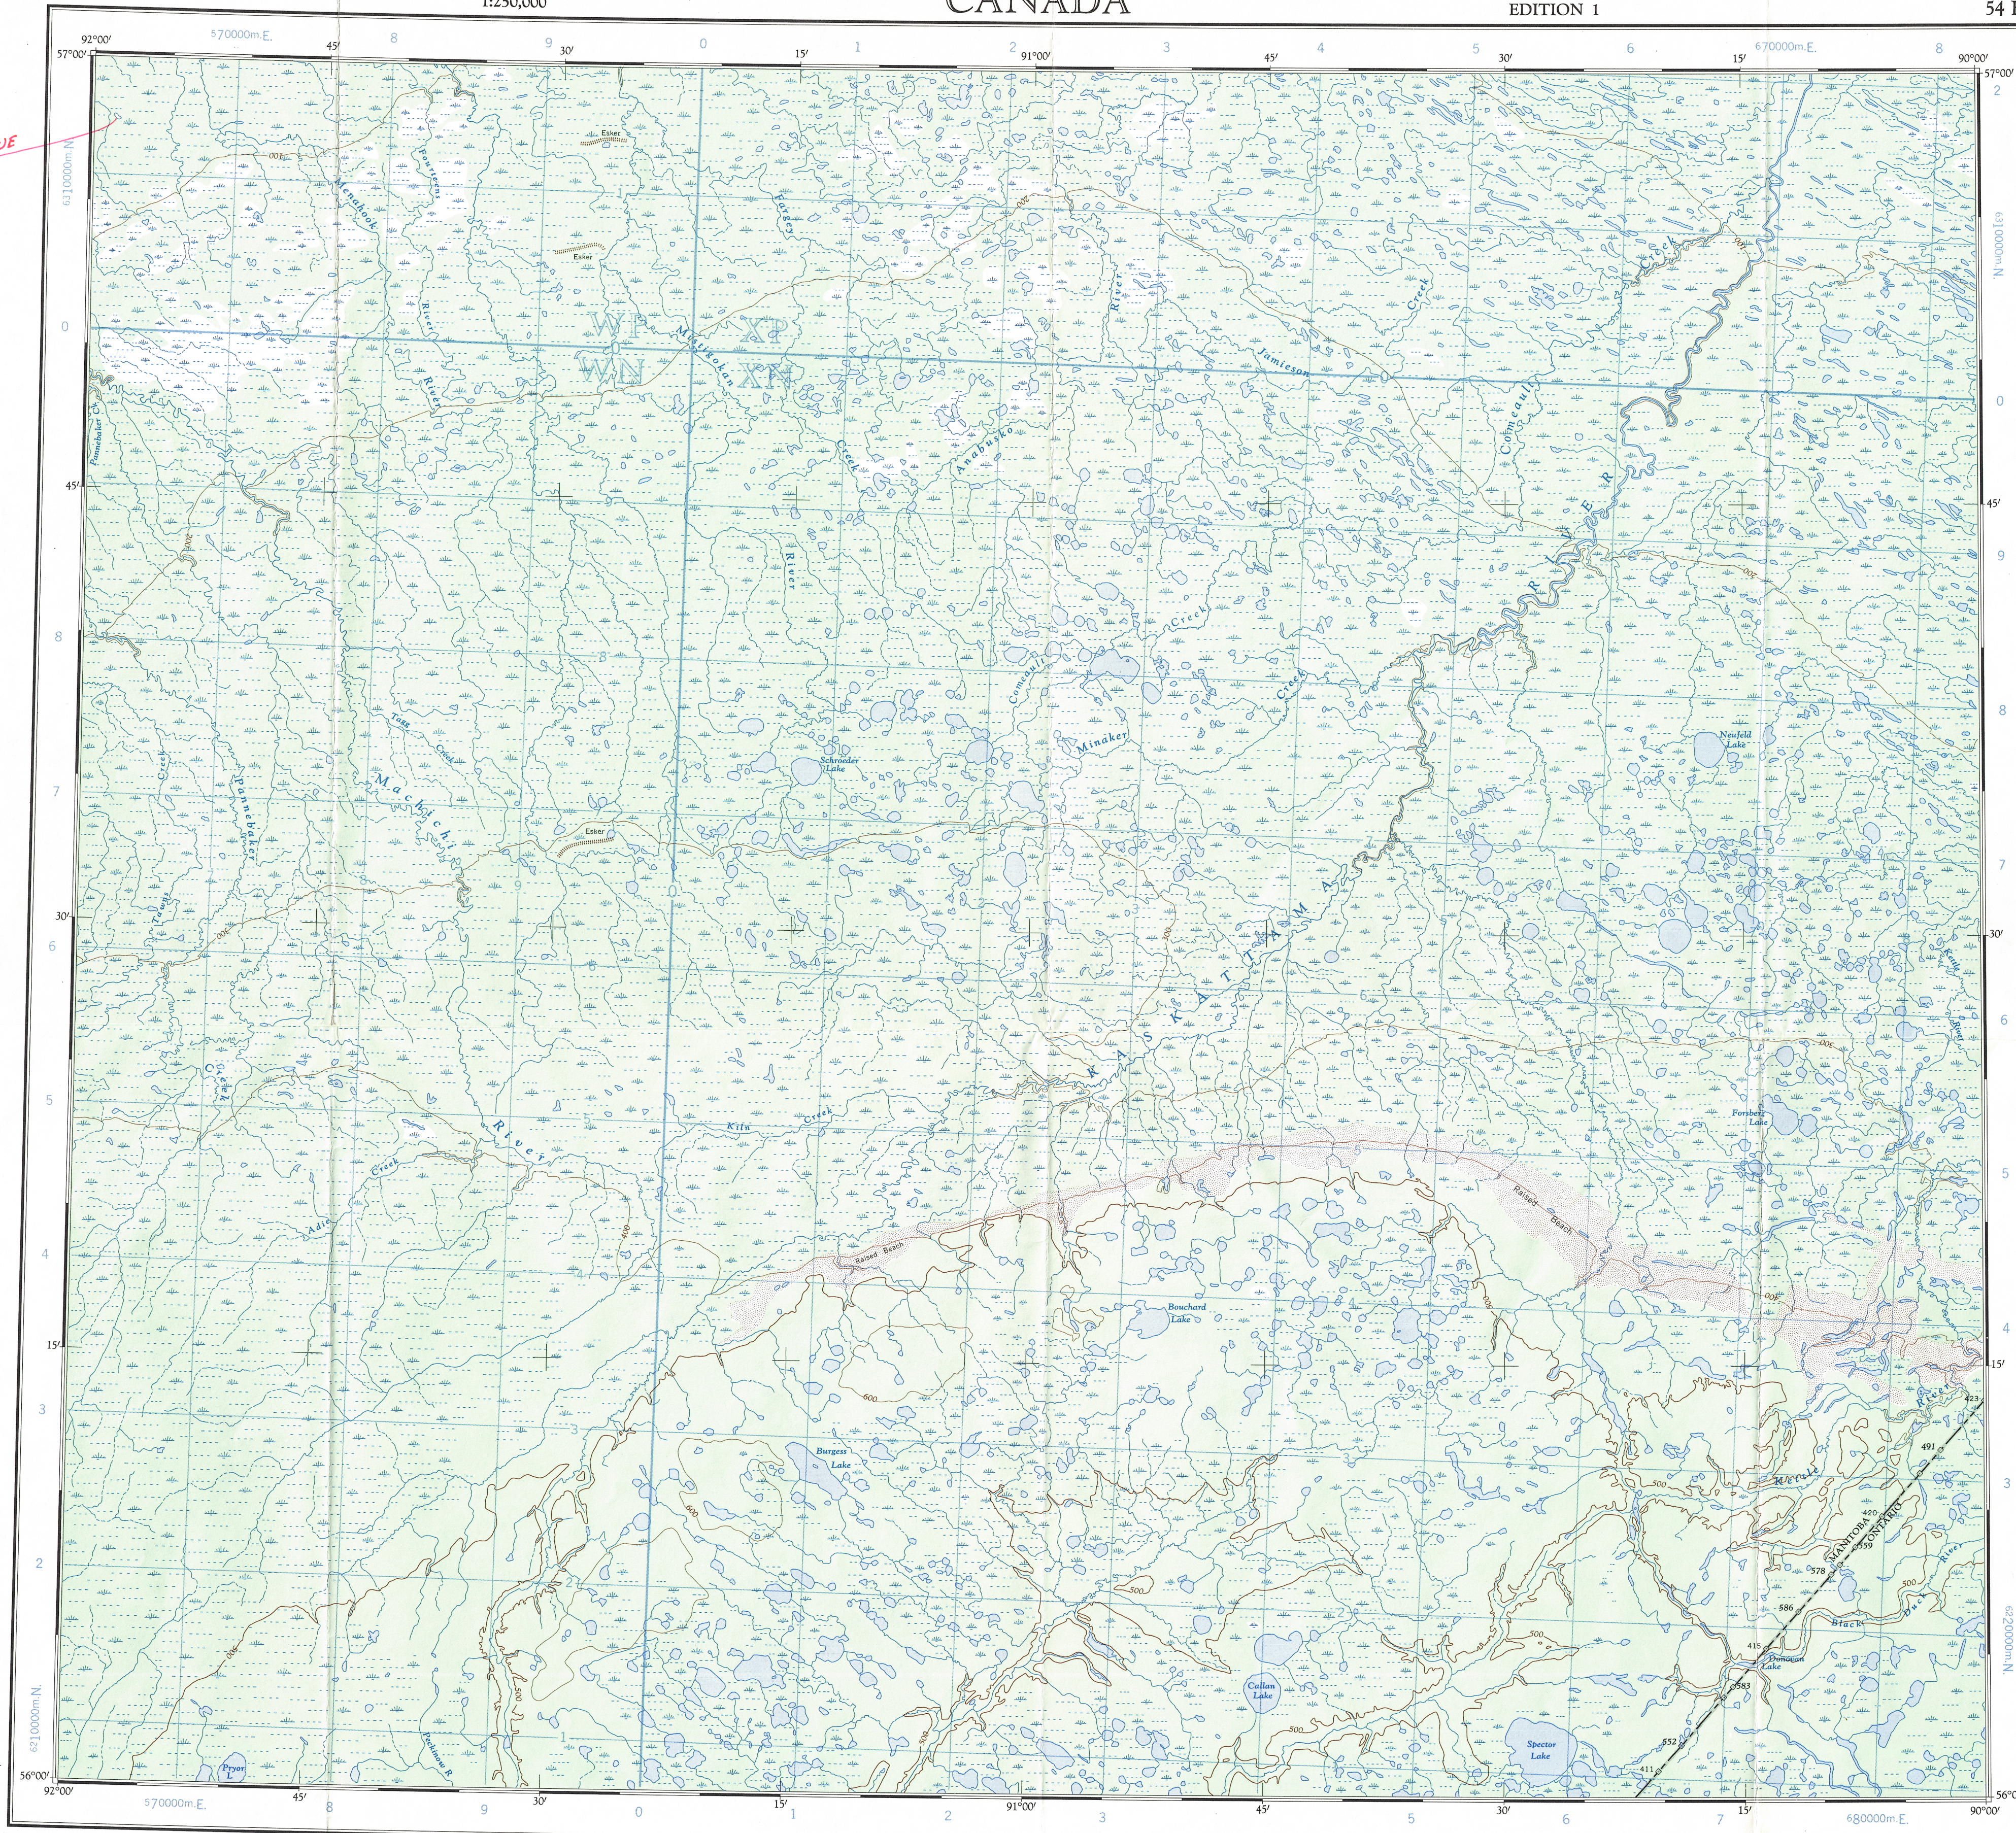

RELIABILITY DIAGRAM - CROQUIS D'EXACTITUDE

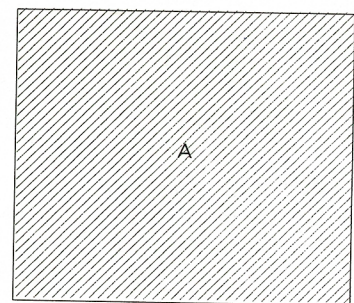

A- Stereocompiled from 1954-1958 aerial photographs.  
A- Rédigé par stéréorestitution d'après des photographies aériennes prises en 1954-1958.

Compiled 1962 by the SURVEYS AND MAPPING BRANCH,  
DEPARTMENT OF MINES AND TECHNICAL SURVEYS.  
Field surveys 1959. Printed 1964.  
Magnetic declination 1964 varies from 01°04' easterly at  
centre of west edge to 02°00' westerly at centre of east  
edge. Mean annual change 4.4' easterly.

Road, dry weather.....Route, temps sec.....  
Wagon or winter road, chemin de terre ou d'hiver.....  
Trail or portage.....Sentier ou portage.....  
Town.....Ville.....  
Village or Settlement, Village ou hameau.....  
Post Office.....Bureau de poste.....  
Horizontal control point, Point géodésique.....  
Boundary monument, Borne frontière.....

Scale 1:250,000 Échelle  
Miles 5 0 5 10 15 20 25 30 Miles  
Kilometres 5 0 5 10 15 20 25 30 Kilomètres  
Transverse Mercator Projection  
North American Datum 1927  
Contour Interval 100 feet  
Elevations in feet above Mean Sea Level  
Projection Transverse de Mercator  
Niveau de référence nord-américain, 1927  
Équidistance des courbes 100 pieds  
Élévations en pieds au-dessus du niveau moyen de la mer


Copies may be obtained from the Map Distribution Office,  
Department of Mines and Technical Surveys, Ottawa.

Ces cartes sont en vente au Bureau de distribution des cartes,  
ministère des Mines et des Relevés techniques, Ottawa.


Rédigée en 1962 par la DIRECTION DES LEVES ET DE LA  
CARTOGRAPHIE, MINISTÈRE DES MINES ET DES RELEVÉS  
TECHNIQUES. Levés sur le terrain en 1959. Imprimée en 1964.  
La déclinaison magnétique pour 1964 varie de 01°04' Est au  
centre de la limite Ouest à 02°00' Ouest au centre de la limite  
Est. Variation moyenne annuelle 4.4' Est.

Stream.....Cours d'eau.....  
Intermittent or dry.....Intermittent ou à sec.....  
Indefinite.....Impécis.....  
Rapids; falls.....Rapides; chute.....  
Marsh or swamp.....Marais ou marécage.....  
Intermittent lake.....Lac intermittent.....  
Depression contours.....Courbes de cuvette.....  
Spot Elevation, in feet, Repère de nivellement en pieds.....2550.

TOPOGRAPHICAL SURVEY DIRECTORATE  
SERVICE TOPOGRAPHIQUE  
DATE 11-06-85  
Q.C. APPROVES RELEASE  
C.O. APPROUVE

GRID ZONE DESIGNATION		100,000 M. SQUARE IDENTIFICATION	
15 V		63	
		6	
		TO GIVE A REFERENCE TO NEAREST 1000 METRES	
EXAMPLE: <b>STREAM JUNCTION</b>			
SQUARE: Read letters of 100,000 m. square <b>XN</b>			
EASTING: Read number on grid line immediately to left of point		2	
Estimate tenths of a square from this line eastward to point		5	
NORTHING: Read number on grid line immediately below point		2	5
Estimate tenths of a square from this line northward to point.		6	
		9	
MILITARY GRID REFERENCE (to nearest 1,000 metres)		<b>XN 2569</b>	
If reporting beyond 15° in any direction, prefix Grid Zone Designation as: <b>15VXN2569</b>			

TEN THOUSAND METRE  
UNIVERSAL TRANSVERSE MERCATOR GRID  
ZONE 15

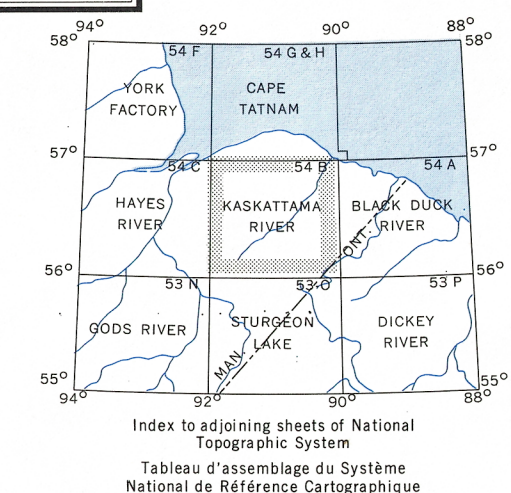

Index to adjoining sheets of National  
Topographic System  
Tableau d'assemblage du Système  
National de Référence Cartographique

KASKATTAMA RIVER  
54 B