

PETER LAKE and WOLLASTON LAKE AREAS, SASKATCHEWAN

In 2004, Fugro Airborne Surveys completed a multi-sensor airborne geophysical survey of the Peter Lake and Wollaston Lake areas, Saskatchewan, for the Geological Survey of Canada and Saskatchewan Industry and Resources. The purpose of the survey was to obtain quantitative gamma-ray spectrometric and aeromagnetic data. The survey was flown over two seasons, from August 31 to September 29, 2003 and July 15 to September 30, 2004 using aCESS Grand Caravan 308 SR aircraft C-DMCA.

Gamma-ray Spectrometric Data

The airborne gamma-ray measurements were made with an Egagromon GR800 gamma-ray spectrometer using fifteen 102 x 102 x 406 mm NaI (Tl) crystals. The main detector array consisted of twelve crystals (total volume 50.4 litres). Three crystals (total volume 12.6 litres), shielded by the main array, were used to detect variations in background radiation caused by atmospheric radon. The system constantly monitored the natural thorium peak for each crystal, and using a Gaussian least-squares algorithm, adjusted the gain for each crystal.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by ⁴⁰K, whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (214Pb for uranium and 208Tl for thorium). Although these daughters are far denser than their parent decay chains, they are assumed to be in equilibrium with their parents; thus gamma-ray spectrometric measurements of uranium and thorium are referred to as equivalent uranium and equivalent thorium, i.e. eU and eTh. The energy windows used to measure potassium, uranium and thorium are:

Potassium (40K) 1370 - 1570 keV
Uranium (238U) 1860 - 1860 keV
Thorium (232Th) 2410 - 2810 keV

Gamma-ray spectra were recorded at one-second intervals at a planned terrain clearance of 125 m and an air speed of 210 km/h. Noise Adjusted Singular Value Decomposition (NASVD) analysis was carried out on the full spectrum 256 channel data to reduce statistical noise in the windowed data. During processing, the spectra were energy calibrated, and counts were accumulated into the windows described above. Counts from the radon detectors were recorded in a 1860 - 1860 keV window and radiation at energies greater than 3000 keV was recorded in the cosmic window. The window counts were corrected for dead time, and for background activity from cosmic radiation, the radioactivity of the aircraft and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air and detectors. Corrections for deviations of altitude from the planned terrain clearance and for variations in temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium and thorium, using factors determined from flights over a calibration range near Ottawa.

Potassium 90.5 cps/ppm
Uranium 11.4 cps/ppm
Thorium 2.7 cps/ppm

Corrected data were filtered and interpolated to a 100 m grid for the 1:250 000 scale map and to a 50 m grid for the 1:50 000 scale map. The results of an airborne gamma-ray spectrometer survey represent the average surface concentrations that are influenced by varying amounts of organic overburden, vegetation cover, soil moisture and surface water. As a result the measured concentrations are usually lower than the actual bedrock concentration. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.

Magnetic Data

The Grand Caravan aircraft was equipped with a Scintrex CS-2 cesium vapour magnetic sensor mounted in a sledge to the rear of the aircraft. The system recorded readings every 0.1 seconds with a noise level of less than 0.1 nT. Magnetic interference caused by aircraft maneuvers were compensated using an RMS AADCII Magnetic compensator. Diurnal variations were recorded using a Fugro CF-10 cesium vapour magnetometer.

After editing the survey data, low pass filtered diurnal readings were subtracted from each unfiltered aeromagnetic reading. The intersections of traverse and control lines were determined and the differences in the magnetic values were computed, analyzed and manually verified to obtain the leveling correction. The intersection Geomagnetic Reference Field was calculated and removed using a fixed data (20040815) and an altitude of 545 m for each data point. The corrected magnetic data was interpolated to a 100 m grid using a minimum curvature algorithm. The final vertical derivative grid was calculated from the corrected total magnetic intensity grid using a FFT based frequency domain filtering algorithm.

Positional Data

The 400 m spaced survey lines were oriented southeast - northwest and 4000 m spaced control lines were oriented southeast - northeast. Survey and control line positions and elevations were pre-planned using G.S.C. Smooth Drape software. Positional data were recorded using a Novatel Posipak K180101, GPS ground station data were combined with ground GPS data to produce differentially corrected positional data with an accuracy of 2 to 3 m.

Data Presentation

Colour levels and contours were calculated for each grid and combined with map surround information to create postscript plot files, which were plotted using Fugro's HP DesignJet colour plotters.

PLANIMETRIC SYMBOLS

Topographic Contour: ---
 Railway: ---
 Power Line: ---
 Drainage: ---
 Road: ---
 Figure No. 64504: ---
 Figure No. 64504: ---

NATIONAL TOPOGRAPHICAL SYSTEM REFERENCE AND GEOPHYSICAL MAP INDEX

64501	64502	64503	64504
64505	64506	64507	64508
64509	64510	64511	64512
64513	64514	64515	64516
64517	64518	64519	64520
64521	64522	64523	64524
64525	64526	64527	64528
64529	64530	64531	64532
64533	64534	64535	64536
64537	64538	64539	64540
64541	64542	64543	64544
64545	64546	64547	64548
64549	64550	64551	64552
64553	64554	64555	64556
64557	64558	64559	64560
64561	64562	64563	64564
64565	64566	64567	64568
64569	64570	64571	64572
64573	64574	64575	64576
64577	64578	64579	64580
64581	64582	64583	64584
64585	64586	64587	64588
64589	64590	64591	64592
64593	64594	64595	64596
64597	64598	64599	64600



Recommended citation:
 Ford, K.L., Carson, J.M., Dumont, R., Polvin, J., Shives, R.B.K., Delaney, G. and Stimson, W.
 2005. Geophysical Series - NTS 74H/9 - Mcdowell Lake, Saskatchewan.
 Geological Survey of Canada Open file 4863,
 Saskatchewan Industry and Resources Open file 2005-17
 Scale 1:50 000

This airborne geophysical survey and the production of this map were funded by the Government of Saskatchewan's Mineral Exploration Incentive Program

**GEOPHYSICAL SERIES - 74H/9 - MCDOWELL LAKE
SASKATCHEWAN**

URANIUM / THORIUM MAP

Scale 1:50 000 - Échelle 1/50 000

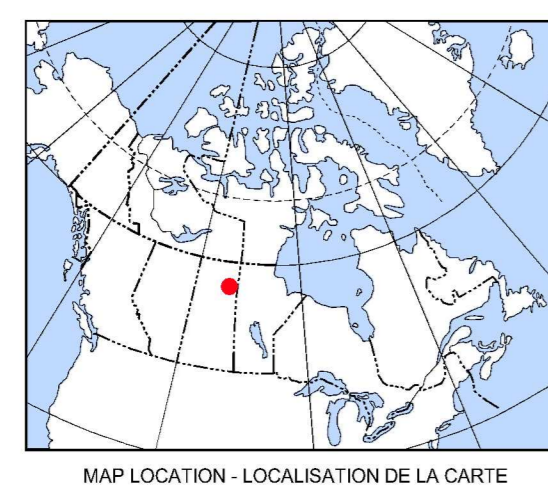

OPEN FILE DOSSIER PUBLIC 4863
 2005
 Les données publiques sont des produits qui sont publiés en vertu de la Loi sur l'accès à l'information et de la Loi sur la protection des renseignements personnels.

SASKATCHEWAN INDUSTRY AND RESOURCES
 OPEN FILE 2005-17
 SHEET 5 OF 10
 FEUILLET 5 OF 10

URANIUM / THORIUM MAP

**MCDOWELL LAKE
SASKATCHEWAN
NTS 74H/9**

Universal Transverse Mercator Projection
 North American Datum 1983
 Système de référence géodésique nord-américain, 1983
 © Her Majesty the Queen in Right of Canada 2005
 © Sa Majesté la Reine ou chef du Canada 2005
 Digital topographic base information provided by Saskatchewan Industry and Resources.